



B-K LIGHTING, INC.

40429 Brickyard Drive, Madera, CA 93638. Phone: (559) 438-5800
http://www.bklighting.com

IMPORTANT SAFETY INFORMATION – READ, FOLLOW, AND SAVE ALL SAFETY AND INSTALLATION INSTRUCTIONS

- Product must be installed by a Licensed Electrician in a manner consistent with its intended use, and in compliance with the National Electrical Code, Canadian Electrical Code, and all Local and Provincial Codes.
- Follow product label information and instructions.
- Qualified Personnel must perform all servicing or relamping of this product.
- Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker before service.
- The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. The use of damaged components may cause an unsafe condition and void product warranty.
- Do not block light emanating from product in whole or part, as this may cause an unsafe condition.
- Never operate the fixture with missing or damaged lens. Lens must be cleaned on regular basis.
- Lighted lamp gets hot very quickly. Allow it to cool before replacing lamp.
- Entire fixture may become extremely hot. Do not touch hot lens or fixture body. Do not touch the lamp at any time. Use a clean, dry, soft cloth to handle the lamp. Oil from skin may damage the lamp and cause it to rupture.
- Replace lamp only with correct wattage and type of lamp marked on fixture label.
- All gaskets, o-rings, and sealing surfaces must be kept clean during installation and service; failure to do this may cause an unsafe condition and void product warranty.

ALPINE SERIES INSTALLATION INSTRUCTIONS

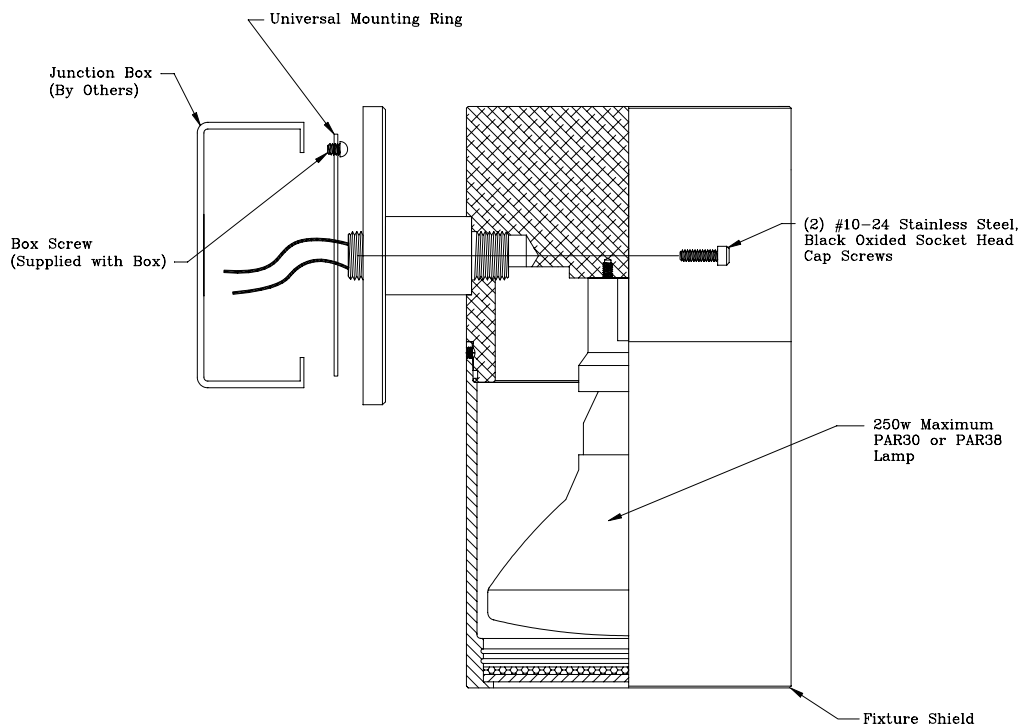

WIRING DIAGRAM

1. Install universal mounting ring to recessed junction box (junction box by others) utilizing (2) box screws supplied with box.
2. Connect 120V wiring using proper wire connectors for the installation (connectors by others).
3. Install fixture to universal mounting ring utilizing (2) #10-24 stainless steel, black oxide hex socket head cap screws supplied.
4. Remove fixture shield and install maximum 250W PAR30 or PAR38 lamp. Reinstall fixture shield.