

Machined Aluminum Denali Fixture with Solid State System

**(Specify Watts & CCT):**

- |                        |                        |
|------------------------|------------------------|
| x98 - 13W/2700K/80CRI  | x101 - 13W/2700K/90CRI |
| x99 - 13W/3000K/80CRI  | x102 - 13W/3000K/90CRI |
| x103 - 13W/3500K/80CRI | x104 - 13W/3500K/90CRI |
| x100 - 13W/4000K/80CRI | x121 - 13W/4000K/90CRI |

- |                        |                        |
|------------------------|------------------------|
| x122 - 21W/2700K/80CRI | x126 - 21W/2700K/90CRI |
| x123 - 21W/3000K/80CRI | x127 - 21W/3000K/90CRI |
| x124 - 21W/3500K/80CRI | x128 - 21W/3500K/90CRI |
| x125 - 21W/4000K/80CRI | x129 - 21W/4000K/90CRI |

**(Specify Cap Style):** "A", "B", "C", "D" or "E"


**(Specify Optics):** SP (15°), FL (35°) or WFL (60°)

**(Specify Lens/Shielding Types):**

- #9 Clear (Standard)
- #11 Honeycomb Baffle
- #12 Soft Focus
- #13 Rectilinear

**(Specify Dimming):**

- INC (120V Only)
- ELV (120V Only)
- 0-10 (120V -277V)

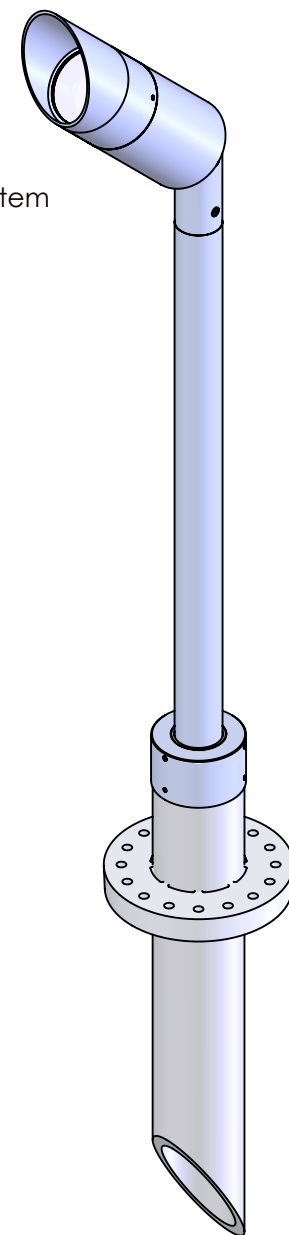

ALL DIMENSIONS INDICATED ON THIS SUBMITTAL ARE NOMINAL. CONTACT TECHNICAL SALES IF YOU REQUIRE MORE STRINGENT DIMENSIONAL SPECIFICATIONS.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING IS STRICTLY FORBIDDEN.



Revision "A" 03/07/22

DENALI INTEGRAL ON 18" ADJUSTABLE PPII

01/14/22

**B-K LIGHTING, INC.**

DRAWING NUMBER  
CUS-1513-50