

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:



*120V only

CATALOG NUMBER LOGIC

Example: B - YK - D - LED - A2780 - MAC - V - SD - 010 - MT

MATERIAL

(Blank) - Aluminum B - Brass S - Stainless Steel

SERIES

YK - Yukon Commercial Steplight

STYLE

D - Direct

SOURCE

LED - Linear Array

LED TYPE

A2780 - 10W/2700K/80CRI A2790 - 10W/2700K/90CRI

A3080 - 10W/3000K/80CRI A3090 - 10W/3000K/90CRI

A3580 - 10W/3500K/80CRI A3590 - 10W/3500K/90CRI

A4080 - 10W/4000K/80CRI A4090 - 10W/4000K/90CRI

FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

Also available in RAL Finishes

Brass Finishes (MAC, POL, MIT)

Stainless Steel Finishes (MAC, POL)

ORIENTATION

V - Vertical

H - Horizontal

FACEPLATE

SD - Standard LD - Louvered VR - Visor DO - Deco

CO - Compass RN - Ribbon LY - Layered

CONTROL TYPE

ELV - 10W Dimming Driver (For use with Electronic Low Voltage Dimmer)*

INC - 10W Dimming Driver (For use with Incandescent Dimmer)*

0-10 - 10W Dimming Driver (For use with 0-10 Dimmer)

INPUT VOLTAGE


MT - 120-277 VAC

DATE:

PROJECT:

TYPE:


* Fixture Weight ≈ 2.88lbs max

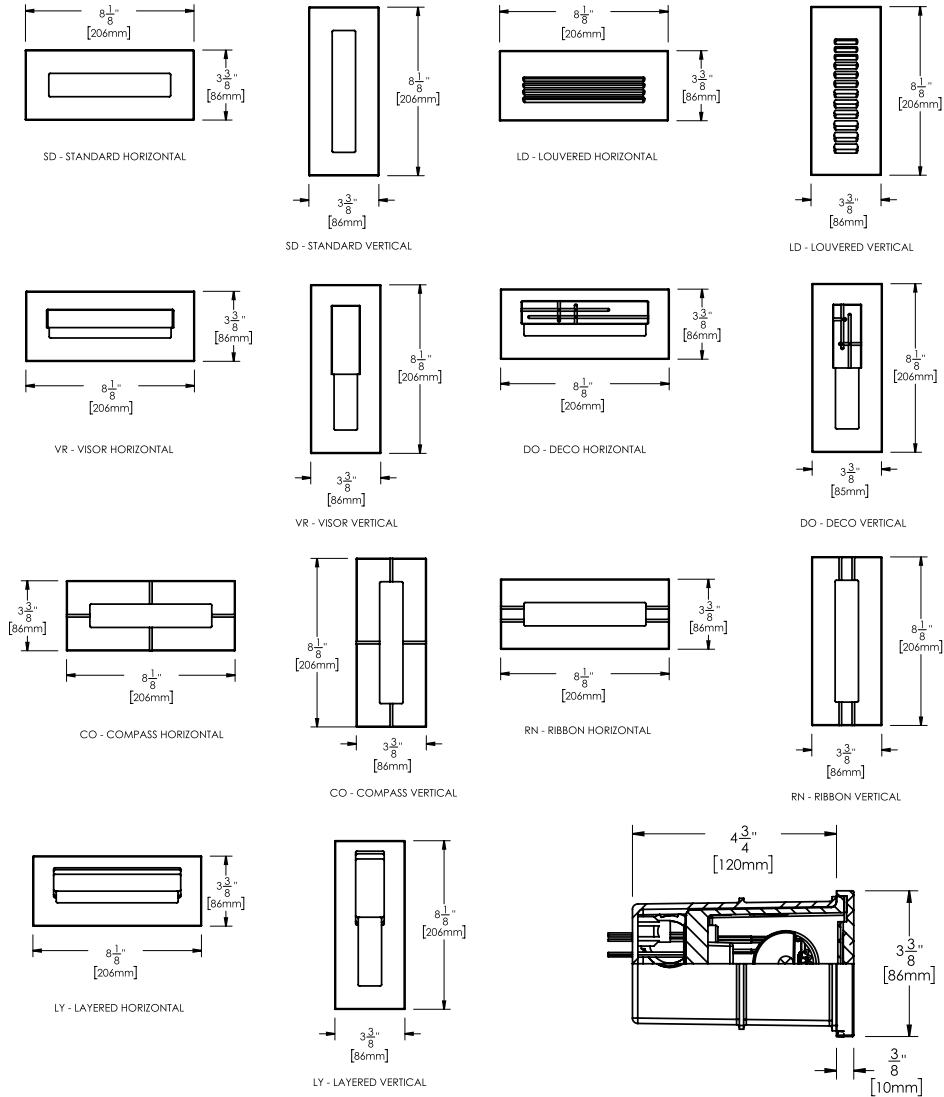

STANDARD FINISHES



PREMIUM FINISHES

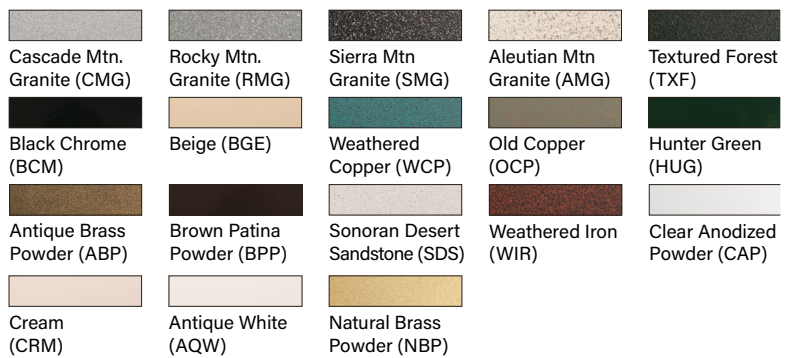




[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

SPECIFICATIONS

ELECTRICAL	WATTAGE	9.5W
	OPERATING VOLTAGE	120-277 VAC
	WIRING	18GA Stranded, XLPE, 150°C, 600V wire.
	DRIVER	With [1] 350mA, Class II, constant current integral driver. 50/60 Hz. >0.9 Power Factor, 5A in-rush current (typical at 120 VAC), ≤20%THD (nominal at 120 VAC full load). Output over-voltage, over-current, and short circuit protection with auto recovery. Dimming driver for use with 0-10V, Incandescent, Standard TRIAC, or ELV dimmers. 1-100% range. *TRIAC/ELV dimming at 120 VAC only.
PHYSICAL	MATERIALS	Furnished in copper-free aluminum (6061-T6)
	HOUSING	Corrosion-free composite, made from high strength, thermo-formed, sheet molded polyester compound. Glass reinforced, flame retardant with knockout plugs and four (4) side flats for 1/2" or 3/4" conduit adapters.
	WATER MANAGEMENT	Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.
	FACEPLATE	Fully machined. Offered with non-visible, tamper-resistant set screws.
	FINISH	StarGuard®, our exclusive RoHs compliant, 15 stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. Brass components are available in powder coat or handcrafted metal finish. Stainless steel components are available in handcrafted metal finish.
	WARRANTY	5-year limited warranty.
	CERTIFICATION & LISTING	UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant. Suitable for indoor or outdoor use, in wet locations, and for installation within 4' of the ground. For use in concrete. IP66 Rated. Made in the USA.
  		

LAMP & DRIVER DATA (YUKON DIRECT - HORIZONTAL)

DATE: _____ PROJECT: _____ TYPE: _____

LM79 DATA

OPTICAL DATA

BK No.	CCT (Typ.)	CRI (Typ.)	Fixture Watts	L70 Data	LED Orientation	Faceplate	Accessory/ Optic	Roadway Class	Bug	Del. Lumens	Multiplier
A2780	2700	80	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	305	0.92
A2780	2700	80	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	447	0.92
A2780	2700	80	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	122	0.92
A2780	2700	80	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	182	0.92
A3080	3000	80	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	314	0.95
A3080	3000	80	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	462	0.95
A3080	3000	80	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	126	0.95
A3080	3000	80	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	188	0.95
A3580	3500	80	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	334	1.01
A3580	3500	80	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	491	1.01
A3580	3500	80	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	134	1.01
A3580	3500	80	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	200	1.01
A4080	4000	80	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	331	1.00
A4080	4000	80	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	486	1.00
A4080	4000	80	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	133	1.00
A4080	4000	80	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	198	1.00
A2790	2700	90	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	254	0.77
A2790	2700	90	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	373	0.77
A2790	2700	90	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	102	0.77
A2790	2700	90	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	152	0.77
A3090	3000	90	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	263	0.79
A3090	3000	90	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	385	0.79
A3090	3000	90	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	105	0.79
A3090	3000	90	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	157	0.79
A3590	3500	90	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	279	0.84
A3590	3500	90	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	410	0.84
A3590	3500	90	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	112	0.84
A3590	3500	90	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	167	0.84
A4090	4000	90	9.5	50,000	Horizontal	SD	1	Type II	B0 U3 G1	276	0.83
A4090	4000	90	9.5	50,000	Horizontal	SD	2	Type III	B0 U3 G1	406	0.83
A4090	4000	90	9.5	50,000	Horizontal	LV	1	Type I	B0 U2 G1	111	0.83
A4090	4000	90	9.5	50,000	Horizontal	VR	1	Type I	B0 U2 G1	165	0.83

LAMP & DRIVER DATA (YUKON DIRECT - VERTICAL)

DATE: _____ PROJECT: _____ TYPE: _____

LM79 DATA

OPTICAL DATA

BK No.	CCT (Typ.)	CRI (Typ.)	Fixture Watts	L70 Data	LED Orientation	Faceplate	Accessory/ Optic	Roadway Class	Bug	Del. Lumens	Multiplier
A2780	2700	80	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	307	0.92
A2780	2700	80	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	454	0.92
A2780	2700	80	9.5	50,000	Vertical	LD	1	Type I	B0 U2 G1	149	0.92
A2780	2700	80	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	162	0.92
A3080	3000	80	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	317	0.95
A3080	3000	80	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	469	0.95
A3080	3000	80	9.5	50,000	Vertical	LD	1	Type I	B0 U2 G1	154	0.95
A3080	3000	80	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	167	0.95
A3580	3500	80	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	337	1.01
A3580	3500	80	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	499	1.01
A3580	3500	80	9.5	50,000	Vertical	LD	1	Type I	B0 U2 G1	164	1.01
A3580	3500	80	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	178	1.01
A4080	4000	80	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	334	1.00
A4080	4000	80	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	494	1.00
A4080	4000	80	9.5	50,000	Vertical	LV	1	Type I	B0 U2 G1	162	1.00
A4080	4000	80	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	176	1.00
A2790	2700	90	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	257	0.77
A2790	2700	90	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	379	0.77
A2790	2700	90	9.5	50,000	Vertical	LD	1	Type I	B0 U2 G1	124	0.77
A2790	2700	90	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	135	0.77
A3090	3000	90	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	265	0.79
A3090	3000	90	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	392	0.79
A3090	3000	90	9.5	50,000	Vertical	LD	1	Type I	B0 U2 G1	128	0.79
A3090	3000	90	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	140	0.79
A3590	3500	90	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	282	0.84
A3590	3500	90	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	417	0.84
A3590	3500	90	9.5	50,000	Vertical	LD	1	Type I	B0 U2 G1	137	0.84
A3590	3500	90	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	148	0.84
A4090	4000	90	9.5	50,000	Vertical	SD	1	Type II	B0 U3 G1	279	0.83
A4090	4000	90	9.5	50,000	Vertical	SD	2	Type II	B0 U3 G1	412	0.83
A4090	4000	90	9.5	50,000	Vertical	LD	1	Type I	B0 U2 G1	135	0.83
A4090	4000	90	9.5	50,000	Vertical	VR	1	Type I	B0 U2 G1	147	0.83