

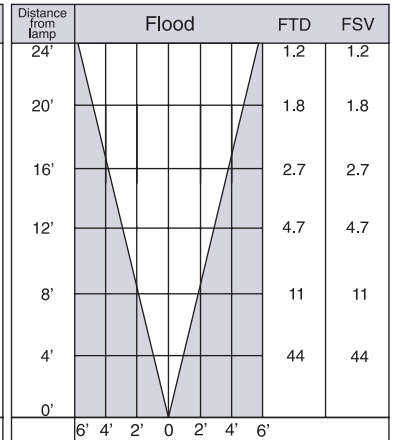


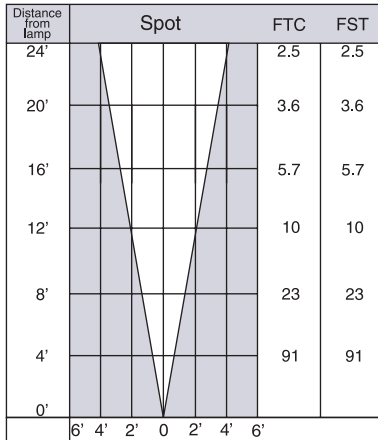

# MR11 Halogen

BK No.	Lamp Watts	ANSI Code	Rated Life	Center Beam Cndlpwr.	Beam Angle	Beam Type
10	12	FTA	2000	1,500	8°	N. Spot
11	20	FTB	2000	4,200	8°	N. Spot
12	20	FTC	2000	1,450	19°	Spot
13	20	FTD	2000	700	28°	Flood
DC Bayonet Base						
21	12	RN	2000	1,500	8°	N. Spot
22	20	FSS	2000	4,200	8°	N. Spot
23	20	FST	2000	1,450	19°	Spot
24	20	FSV	2000	700	28°	Flood

Note: If using No. 11 honeycomb baffle multiply footcandle or candela values by .80.

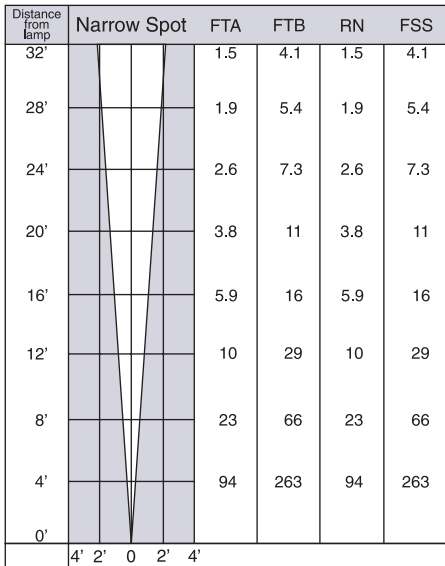

Values are center beam footcandles • Beam width to 50% of center beam footcandles



# Miniature Halogen Type JC

BK No.	Lamp Watts	Description	Rated Life	Initial Lumens
18	5	Q5T3	2000	60
19	10	Q10T3	2000	140
20	20	Q20T3 or T4	2000	350
64	35	Q35T4	2000	560
65	50	Q50T4	2000	950
83	75	Q75T4	2000	1420