
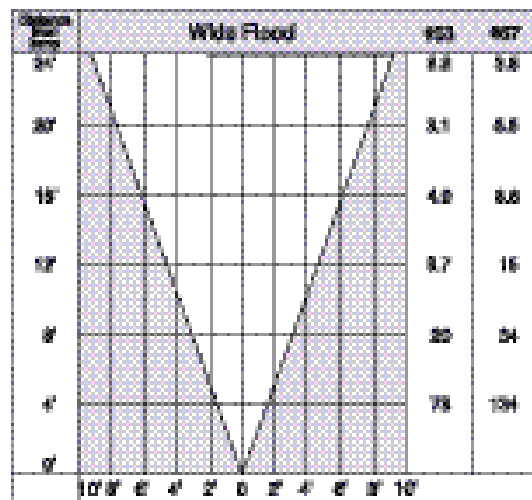
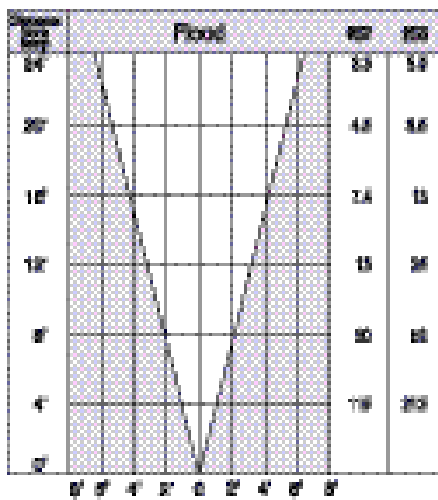
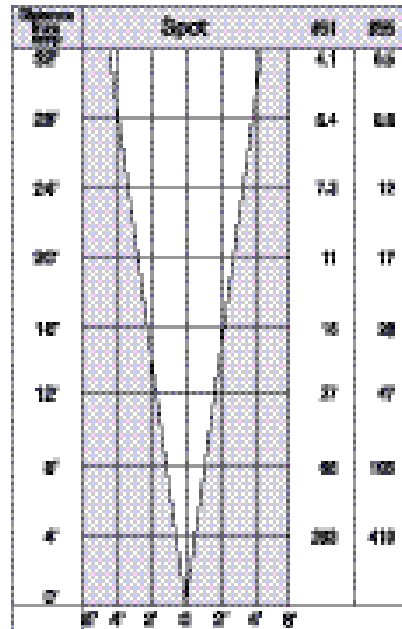


Lamp Data

PAR-30 Halogen

BK No.	Lamp Watts	Description	Rated Life	Center Beam Candlepower	Beam Angle	Beam Type
50	50	50PAR30L/H/NSP9	2,000	9,900	9°	Narrow Spot
51	50	50PAR30L/H/SP16	2,000	4,200	16°	Spot
52	50	50PAR30L/H/FL30	2,000	1,900	30°	Flood
53	50	50PAR30L/H/WFL40	2,000	1,250	40°	Wide Flood
54	75	75PAR30L/H/NSP9	2,000	15,500	9°	Narrow Spot
55	75	75PAR30L/H/SP16	2,000	6,700	16°	Spot
56	75	75PAR30L/H/FL30	2,000	3,400	30°	Flood
57	75	75PAR30L/H/WFL40	2,000	2,200	40°	Wide Flood

Note: If using No. 11 honeycomb baffle multiply footcandle values by .80

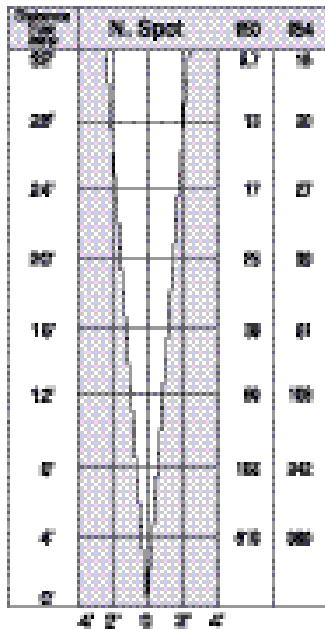





Values are center beam footcandles • Beam width to 50% of center beam footcandles

Lamp Data

PAR-38 Halogen

BK No.	Lamp Watts	Description	Rated Life	Center Beam Candlepower	Beam Angle	Beam Type
131	75	75PAR38/H/NSP9	2,500	18,000	9°	Narrow Spot
132	75	75PAR38/H/WSP12	2,500	11,000	12°	Spot
133	75	75PAR38/H/FL30	2,500	3,150	30°	Flood
134	75	75PAR38/H/WFL50	2,500	1,200	50°	Wide Flood
75	90	90PAR38/CAP/NSP9	2,500	19,500	9°	Narrow Spot
76	90	90PAR38/CAP/SP12	2,500	12,000	12°	Spot
77	90	90PAR38/CAP/FL30	2,500	3,750	30°	Flood
135	90	90PAR38/H/WFL50	6,000	2,800	50°	Wide Flood
78	120	120PAR38/CAP/NSP10	3,000	25,000	10°	Narrow Spot
79	120	120PAR38/CAP/FL30	3,000	5,000	30°	Flood
80	120	120PAR38/CAP/FL50	3,000	2,000	50°	Flood
136	250	250PAR38/H/NSP10	4,200	40,000	10°	Narrow Spot
137	250	250PAR38/H/FL30	4,200	9,000	30°	Flood

Note: If using No. 11 honeycomb baffle multiply footcandle values by .80

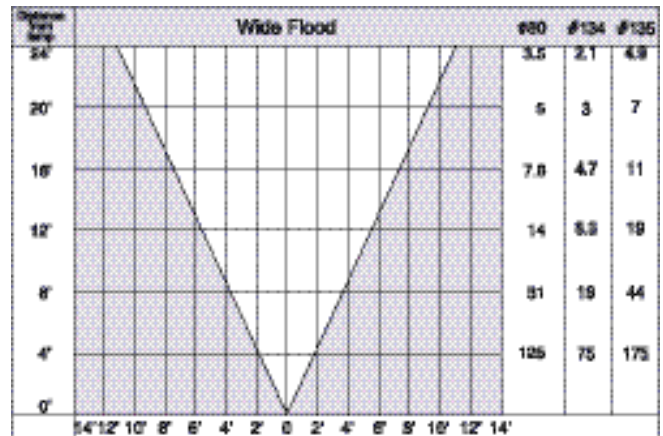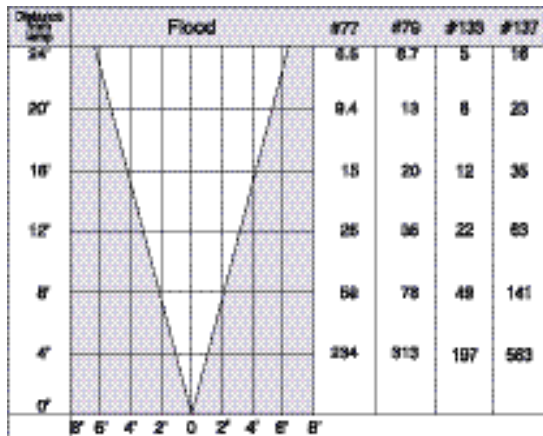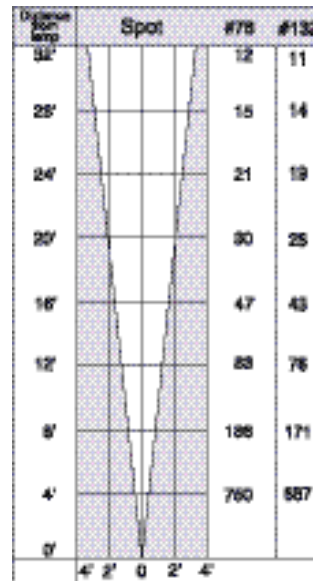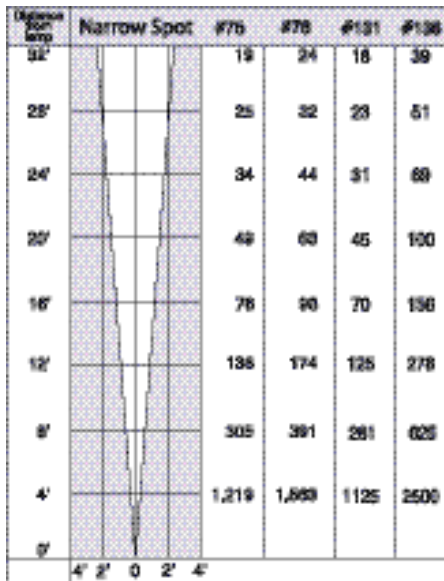

Values are center beam footcandles • Beam width to 50% of center beam footcandles