

# Photometrics




## PAR-20 Metal Halide

BK No.	Lamp Watts	Description	Rated Life	Center Beam Candlepower	Beam Angle	Beam Type	CRI	CCT(K)
308	20	20PAR20/MH/SP	7,500	13,000	8°	Spot	81	3000
309	20	20PAR20/MH/FL	7,500	3,750	25°	Flood	81	3000
58	35	35PAR20/MH/SP	9,000	23,000	10°	Spot	81	3000
59	35	35PAR20/MH/FL	9,000	5,000	30°	Flood	81	3000

## PAR-30 Metal Halide

BK No.	Lamp Watts	Description	Rated Life	Center Beam Candlepower	Beam Angle	Beam Type	CRI	CCT(K)
60	35	35PAR30/MH/SP	9,000	44,000	10°	Spot	81	3000
61	35	35PAR30/MH/FL	9,000	7,400	30°	Flood	81	3000
62	70	70PAR30/MH/SP	11,000	68,000	10°	Spot	83	3000
63	70	70PAR30/MH/FL	11,000	10,000	40°	Flood	83	3000

Note: If using No. 11 honeycomb baffle multiply footcandle values by .80

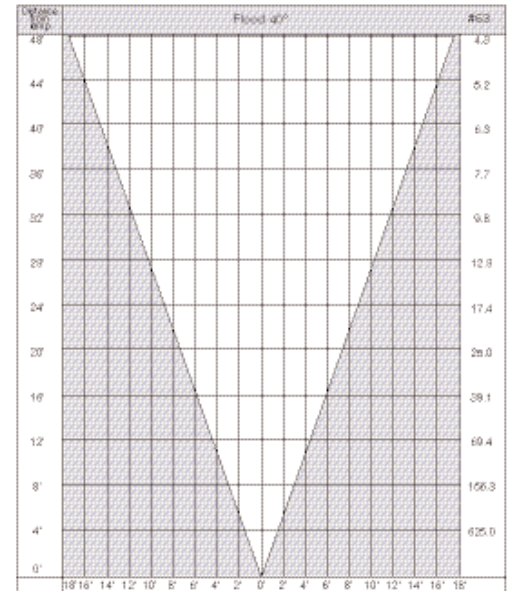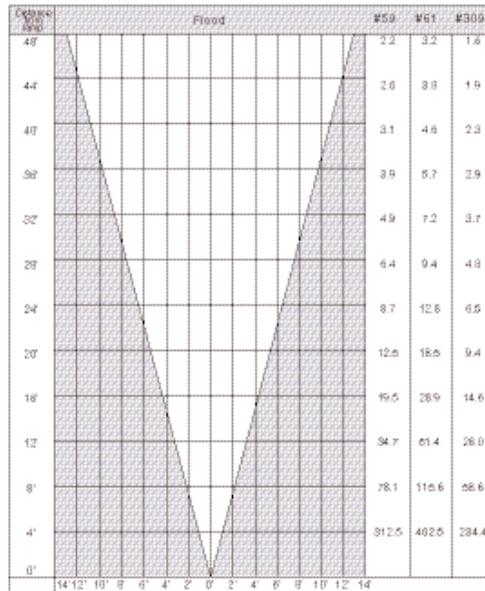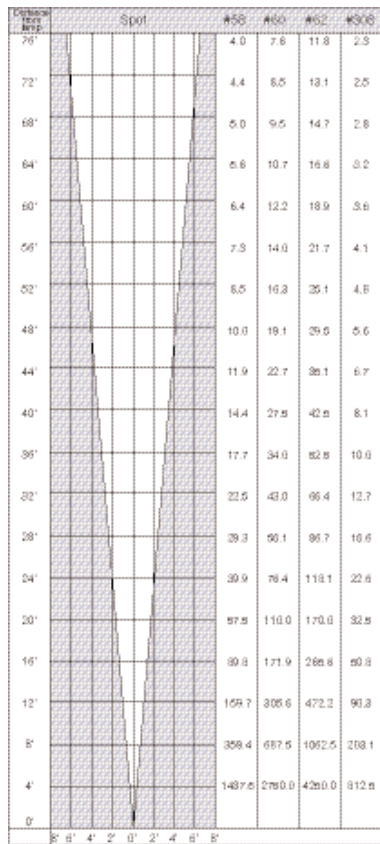

Values are center beam footcandles • Beam width to 50% of center beam footcandles