


# Lamp Data

## PAR-38 Metal Halide

BK No.	Lamp Watts	Description	Rated Life	Center Beam Candlepower	Beam Angle	Beam Type
66	70	70PAR38/MH/SP	7,500	28,000	15°	Spot
67	70	70PAR38/MH/FL	7,500	16,000	30°	Flood
68	70	70PAR38/MH/WFL	7,500	4,000	65°	Wide Flood
69	100	100PAR38/MH/SP	7,500	40,000	15°	Spot
70	100	100PAR38/MH/FL	7,500	21,000	30°	Flood
71	100	100PAR38/MH/WFL	7,500	6,000	65°	Wide Flood
72	150	150PAR38/MH/SP	8,500	34,000	20°	Spot
73	150	150PAR38/MH/FL	8,500	17,000	35°	Flood
74	150	150PAR38/MH/WFL	8,500	7,500	65°	Wide Flood
138	175	175PAR38/MH/FL	7,500	6,500	50°	Flood

Note: If using No. 11 honeycomb baffle multiply footcandle values by .80

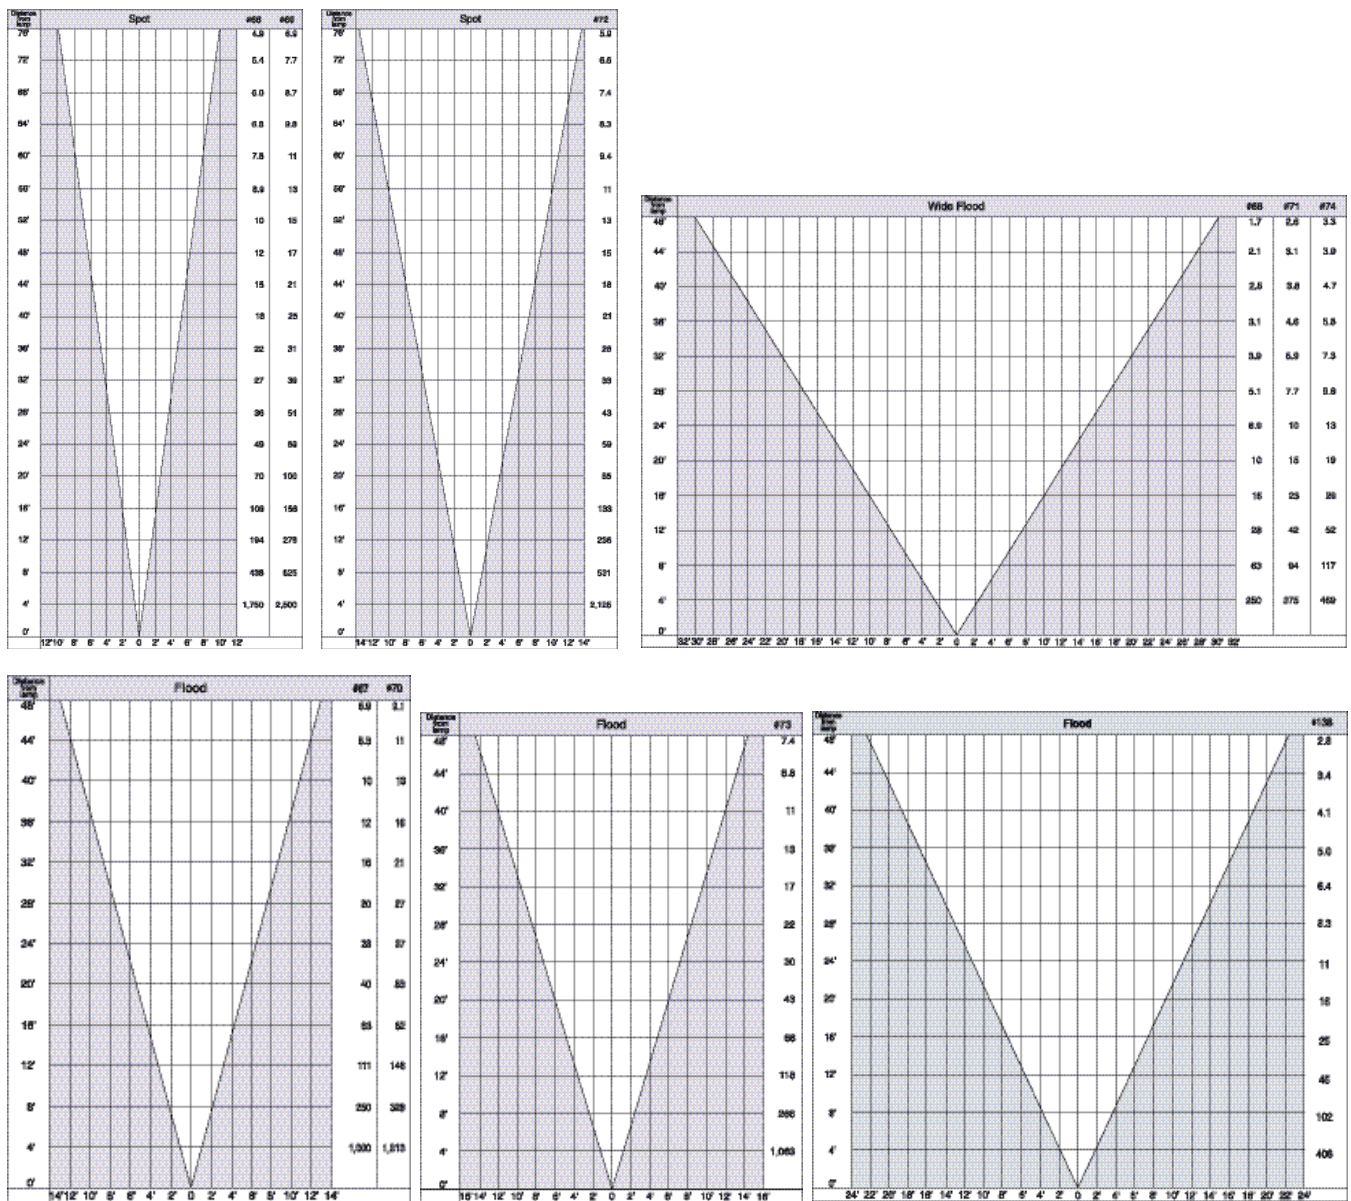

Values are center beam footcandles • Beam width to 50% of center beam footcandles