

Machined Aluminum Denali
with Solid State System

(Specify CCT):

- x58 - 12W/2700K/80CRI x62 - 20W/3000K/80CRI
- x59 - 12W/3000K/80CRI x63 - 20W/4000K/80CRI
- x60 - 12W/4000K/80CRI x64 - 27W/2700K/80CRI
- x61 - 20W/2700K/80CRI x65 - 27W/3000K/80CRI

- x66 - 27W/4000K/80CRI
- x67 - 27W/2700K/90CRI
- x68 - 27W/3000K/90CRI
- x69 - 27W/3500K/80CRI



(Specify Optics): SP (15°), FL (35°), or WFL (60°)

(Specify Lens/Shielding Types):

- #9 - Clear (Standard)
- #10 - Spread
- #11 - Honeycomb Baffle
- #12 - Soft Focus
- #13 - Rectilinear

(Specify Cap): "A", "B" or "C"

- Machined Aluminum PP-"B" Cap
- PVC 12Volt Splice Compartment
- (2) 1/2" NPT Connectors
- 10" Square HRPO Steel Base

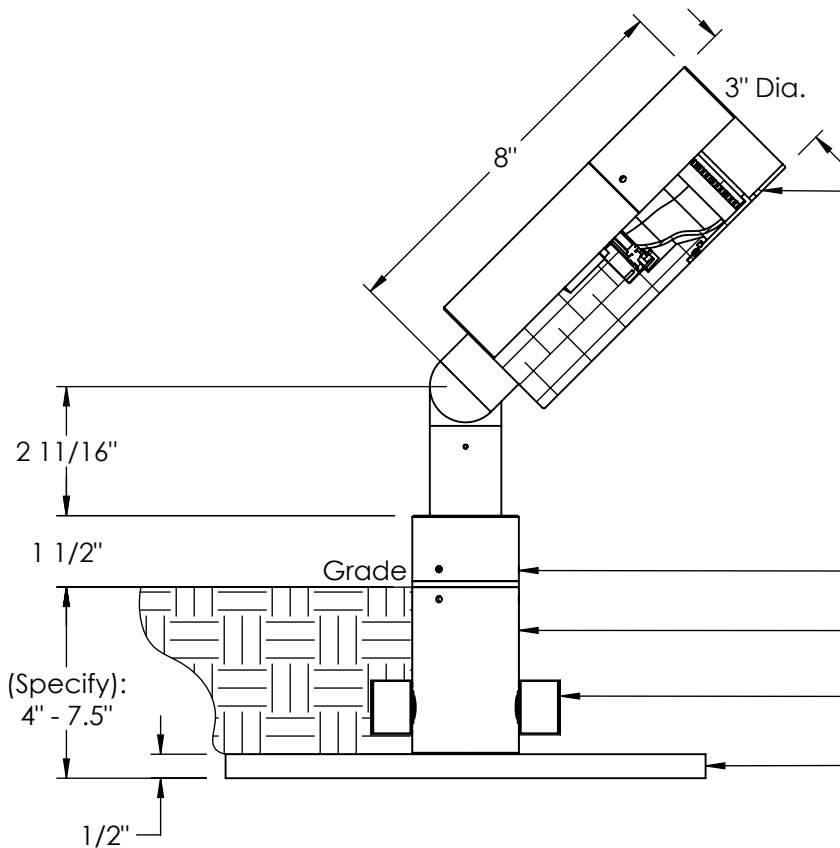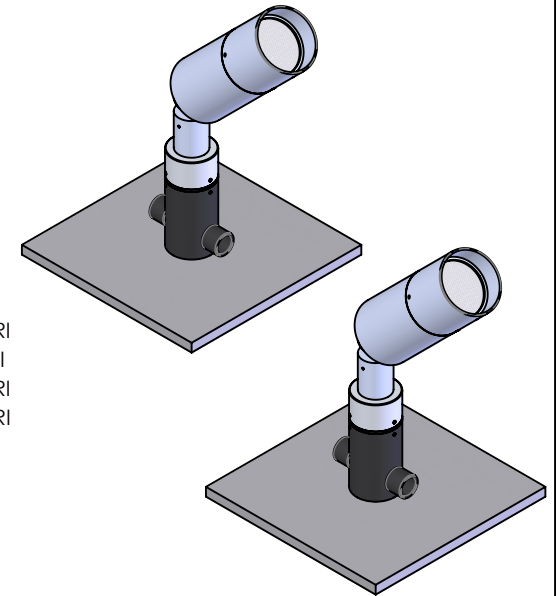


NEMA Type 3R, 4"D X 8"W X 12"H
Enclosure with (2) Drivers

(Specify):

- 12W
- 20W
- 27W

(Specify Control Type):

- INC - 120V
- ELV - 120V
- 010 - 120V - 277V



ALL DIMENSIONS INDICATED ON THIS SUBMITTAL ARE NOMINAL. CONTACT TECHNICAL SALES IF YOU REQUIRE MORE STRINGENT DIMENSIONAL SPECIFICATIONS.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING IS STRICTLY FORBIDDEN.



Revision "B" 04/12/17

(2) DENALI LED FIXTURE ON STEEL BASE

08/08/14

B-K LIGHTING, INC.

DRAWING NUMBER
CUS-1534-41