

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Symmetrical Optics

NEW





IP66



### Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- 2D (.dwg)
- 2D (.dxf)
- IES Files (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

### Product Variant Examples

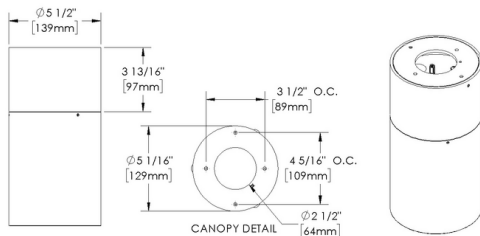

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Symmetrical Optics

## Available Logic & Configurations

AP- CM- RMD- LCB- AL- SM- - -  
01 02 03 04 05 06B 06C 06D

- 01 SERIES**  
AP - ALPINE
- 02 CATEGORY**  
CM - Ceiling Mount
- 03 DRIVER**  
RMD - Remote Driver
- 04 LIGHT SOURCE (TYPE)**  
LCB - LED COB

- 05 MATERIAL**  
AL - Aluminum
- 06B MOUNT**  
SM - Surface Mount
- 06C STYLE**  
CC - Cap C - Flush Lens  
CE - Cap E - 90°
- 06D VERSION**  
OSYM-ONAR - Symmetrical Optics - Narrow Optic  
OSYM-OOth - Symmetrical Optics - Other Optics

- - 12- - - WL00- -  
07 08 10A 10B 11 12

- 07 LIGHT SOURCE**  
x43 - 2700K CRI80 - 34W (1860 - 2212 lm)  
x44 - 3000K CRI80 - 34W (1941 - 2308 lm)  
x45 - 4000K CRI80 - 34W (2034 - 2418 lm)  
x46 - 2700K CRI80 - 42W (2707 - 3817 lm)  
x47 - 3000K CRI80 - 42W (2888 - 4071 lm)  
x48 - 4000K CRI80 - 42W (3008 - 4241 lm)  
x49 - 2700K CRI80 - 57W (3517 - 4958 lm)  
x50 - 3000K CRI80 - 57W (3794 - 5348 lm)  
x51 - 4000K CRI80 - 57W (3974 - 5593 lm)

- 10A LENS**  
12 - Soft Focus
- 10B SHIELDING**  
00 - Not included (Standard)  
11 - Honeycomb Baffle
- 11 WIRING LENGTH**  
WL00 - Standard
- 12 FINISH**  
Standard Finishes  
BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER  
Premium Finishes  
CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,  
WIR, CAP, CRM, AQW, NBP  
Other - RAL  
RAL  
Other - Custom Color  
CUS

- 08 OPTIC**  
NFL - Narrow Flood (25°)  
FL - Flood (40°)  
WFL - Wide Flood (60°)

**NOTE:** Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

**WARNING: This is a remote driver product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote driver separately. (IMPORTANT: Driver wattage MUST match selected fixture wattage. Example: 12W Light Source = 12W Driver)**

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Symmetrical Optics

## Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life



Slip fit cap & high temp. silicone 'O' ring provides reliable water-tight seal



Solid billet fixture body provides unmatched durability and heat management

## Technical

**Driver:** Remote Driver

**Light Source (Type):** LED COB

**Material:** Aluminum

**CCT (K):** 2700, 3000, 4000

**CRI:** 80

**Input Power (W):** 34, 42, 57

**Delivered Lumens (lm):** 1860 - 5593

**Beam Angle (°):** 25, 40, 60

**Mount:** Surface Mount

**Style:** Cap C - Flush Lens, Cap E - 90°

**Version:** Symmetrical Optics - Other Optics, Symmetrical Optics - Narrow Optic

**Lens:** Soft Focus

**Shielding:** Not included (Standard), Honeycomb Baffle

**Wiring Length:** Standard

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

**Body:** Unibody design with enclosed, water-proof wireway, integral heat sink, fully machined from solid billet, anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

**Material Detail:** Furnished in copper-free aluminum (6061-T6).

**Light Source Detail:** COB (Chip on Board) technology and modular design with electrical quick disconnects.

**Optics:** Interchangeable optics permit changes in the field.

**Hardware:** Tamper-resistant, stainless steel hardware.

**Sealing:** 'O' Ring provides water-tight seal., Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

**Finish Detail:** StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

**WARNING: This is a remote driver product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote driver separately. (IMPORTANT: Driver wattage MUST match selected fixture wattage. Example: 12W Light Source = 12W Driver)**

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Symmetrical Optics

## Finishes

### STANDARD FINISHES



[BLP]  
Satin Black



[BZP]  
Satin Bronze



[WHP]  
Satin White



[SAP]  
Satin Aluminum



[BLW]  
Black Wrinkle



[BZW]  
Bronze Wrinkle



[WHW]  
White Wrinkle



[VER]  
Verde

### PREMIUM FINISHES



[CMG]  
Cascade Mountain Granite



[SMG]  
Sierra Mountain Granite



[RMG]  
Rocky Mountain Granite



[AMG]  
Aleutian Mountain Granite



[TXF]  
Textured Forest



[BCM]  
Black Chrome



[BGE]  
Beige



[WCP]  
Weathered Copper



[OCP]  
Old Copper



[HUG]  
Hunter Green



[ABP]  
Antique Brass Powder



[BPP]  
Brown Patina Powder



[SDS]  
Sonoran Desert Sandstone



[WIR]  
Weathered Iron



[CAP]  
Clear Anodized Powder



[CRM]  
Cream



[AQW]  
Antique White



[NBP]  
Natural Brass Powder

### OTHER - RAL



[RAL]  
RAL Color

### OTHER - CUSTOM COLOR



[CUS]  
Custom Color

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Symmetrical Optics

## Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
x43	NFL - Narrow Flood	25	2700	80	>15	34	1915	5435
x43	FL - Flood	40	2700	80	>15	34	2212	3840
x43	WFL - Wide Flood	60	2700	80	>15	34	1860	2697
x44	NFL - Narrow Flood	25	3000	80	>15	34	1998	5672
x44	FL - Flood	40	3000	80	>15	34	2308	4007
x44	WFL - Wide Flood	60	3000	80	>15	34	1941	2814
x45	NFL - Narrow Flood	25	4000	80	>15	34	2091	5908
x45	FL - Flood	40	4000	80	>15	34	2418	4174
x45	WFL - Wide Flood	60	4000	80	>15	34	2034	2931
x46	NFL - Narrow Flood	25	2700	80	>15	42	3817	15755
x46	FL - Flood	40	2700	80	>15	42	3288	4985
x46	WFL - Wide Flood	60	2700	80	>15	42	2707	3386
x47	NFL - Narrow Flood	25	3000	80	>15	42	4071	16805
x47	FL - Flood	40	3000	80	>15	42	3507	5317
x47	WFL - Wide Flood	60	3000	80	>15	42	2888	3612
x48	NFL - Narrow Flood	25	4000	80	>15	42	4241	17505
x48	FL - Flood	40	4000	80	>15	42	3653	5539
x48	WFL - Wide Flood	60	4000	80	>15	42	3008	3725
x49	NFL - Narrow Flood	25	2700	80	>15	57	4958	20563
x49	FL - Flood	40	2700	80	>15	57	4271	6507
x49	WFL - Wide Flood	60	2700	80	>15	57	3517	4420
x50	NFL - Narrow Flood	25	3000	80	>15	57	5348	22181
x50	FL - Flood	40	3000	80	>15	57	4607	7019
x50	WFL - Wide Flood	60	3000	80	>15	57	3794	4767
x51	NFL - Narrow Flood	25	4000	80	>15	57	5593	23105
x51	FL - Flood	40	4000	80	>15	57	4826	7311
x51	WFL - Wide Flood	60	4000	80	>15	57	3974	4966