

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Asymmetrical Optics

NEW





IP66



### Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- 2D (.dwg)
- 2D (.dxf)
- IES Files (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

### Product Variant Examples

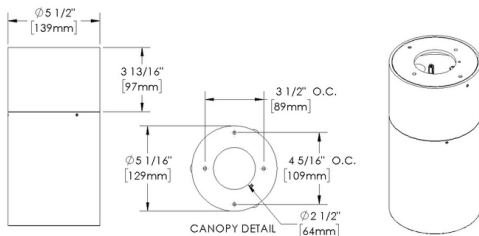

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Asymmetrical Optics

## Available Logic & Configurations

AP- 01 CM- 02 RMD- 03 LCB- 04 AL- 05 SM- 06B - 06C - 06D

- 01 SERIES**  
AP - ALPINE
- 02 CATEGORY**  
CM - Ceiling Mount
- 03 DRIVER**  
RMD - Remote Driver
- 04 LIGHT SOURCE (TYPE)**  
LCB - LED COB

- 05 MATERIAL**  
AL - Aluminum
- 06B MOUNT**  
SM - Surface Mount
- 06C STYLE**  
CC - Cap C - Flush Lens  
CE - Cap E - 90°
- 06D VERSION**  
OASY-BW - Asymmetrical Optics - Batwing  
OASY-WW - Asymmetrical Optics - Wall Wash

- 07 - 08 **12-** **WL00-** -  
10A 11 12

- 07 LIGHT SOURCE**  
x43 - 2700K CRI80 - 34W (2745 - 2745 lm)  
x44 - 3000K CRI80 - 34W (2785 - 2785 lm)  
x45 - 4000K CRI80 - 34W (2937 - 2937 lm)  
x46 - 2700K CRI80 - 42W (2955 - 2955 lm)  
x47 - 3000K CRI80 - 42W (3069 - 3069 lm)  
x48 - 4000K CRI80 - 42W (3117 - 3117 lm)  
x49 - 2700K CRI80 - 57W (3547 - 3547 lm)  
x50 - 3000K CRI80 - 57W (3684 - 3684 lm)  
x51 - 4000K CRI80 - 57W (3743 - 3743 lm)

- 10A LENS**  
12 - Soft Focus
- 11 WIRING LENGTH**  
WL00 - Standard
- 12 FINISH**  
Standard Finishes  
BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER  
Premium Finishes  
CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,  
WIR, CAP, CRM, AQW, NBP  
Other - RAL  
RAL  
Other - Custom Color  
CUS

- 08 OPTIC**  
WW - Wall Wash  
BW - Batwing

**NOTE:** Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

**WARNING: This is a remote driver product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote driver separately. (IMPORTANT: Driver wattage MUST match selected fixture wattage. Example: 12W Light Source = 12W Driver)**

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Asymmetrical Optics

## Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life



Slip fit cap & high temp. silicone 'O' ring provides reliable water-tight seal



Solid billet fixture body provides unmatched durability and heat management

## Technical

**Driver:** Remote Driver

**Light Source (Type):** LED COB

**Material:** Aluminum

**CCT (K):** 2700, 3000, 4000

**CRI:** 80

**Input Power (W):** 34, 42, 57

**Delivered Lumens (lm):** 2745 - 3743

**Mount:** Surface Mount

**Style:** Cap C - Flush Lens, Cap E - 90°

**Version:** Asymmetrical Optics - Batwing, Asymmetrical Optics - Wall Wash

**Lens:** Soft Focus

**Wiring Length:** Standard

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

**Body:** Unibody design with enclosed, water-proof wireway, integral heat sink, fully machined from solid billet, anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

**Material Detail:** Furnished in copper-free aluminum (6061-T6).

**Light Source Detail:** COB (Chip on Board) technology and modular design with electrical quick disconnects.

**Optics:** Interchangeable optics permit changes in the field., Batwing Optics control light for even illumination with superior spacing. They deliver wide-angle distribution, minimize glare above 60°, and balance spacing with visual comfort. Achieve uniform lighting and save energy by using fewer fixtures.

**Hardware:** Tamper-resistant, stainless steel hardware.

**Sealing:** 'O' Ring provides water-tight seal., Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

**Finish Detail:** StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

**WARNING: This is a remote driver product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote driver separately. (IMPORTANT: Driver wattage MUST match selected fixture wattage. Example: 12W Light Source = 12W Driver)**

# ALPINE - Ceiling Mount - Remote Driver - LED COB - Asymmetrical Optics

## Finishes

### STANDARD FINISHES



### PREMIUM FINISHES



### OTHER - RAL



### OTHER - CUSTOM COLOR



# ALPINE - Ceiling Mount - Remote Driver - LED COB - Asymmetrical Optics

## Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
x43	BW - Batwing	60	2700	80	>15	34	2745	
x44	BW - Batwing	60	3000	80	>15	34	2785	
x45	BW - Batwing	60	4000	80	>15	34	2937	
x46	BW - Batwing	60	2700	80	>15	42	2955	
x47	BW - Batwing	60	3000	80	>15	42	3069	
x48	BW - Batwing	60	4000	80	>15	42	3117	
x49	BW - Batwing	60	2700	80	>15	57	3547	
x50	BW - Batwing	60	3000	80	>15	57	3684	
x51	BW - Batwing	60	4000	80	>15	57	3743	
x43	WW - Wall Wash	60	2700	80	>15	34	2890	
x44	WW - Wall Wash	60	3000	80	>15	34	3015	
x45	WW - Wall Wash	60	4000	80	>15	34	3092	