

# ARTI STAR - Wall Mount - Line Voltage - Lamp MR16 Gu10




IP66

**Downloads**

- Product Images (.zip)
- Technical Drawing (.zip)
- 2D (.dwg)
- 2D (.dxf)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

**Product Variant Examples**

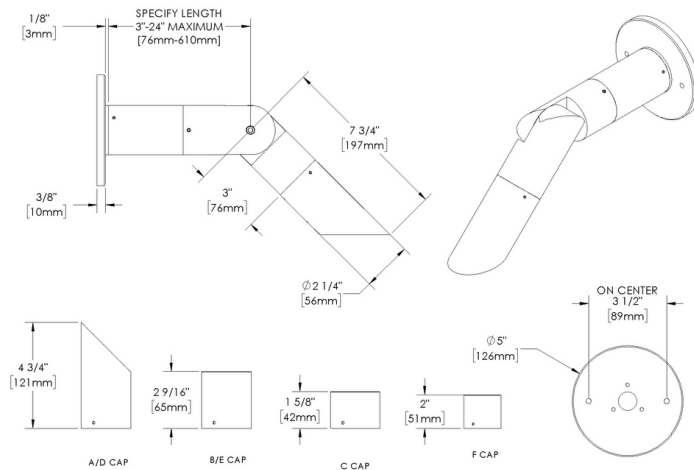

# ARTI STAR - Wall Mount - Line Voltage - Lamp MR16 Gu10

## Available Logic & Configurations

**AR-** **WM-** **LID-** **LAG10-** **-** **BC-** **-** **-**  
 01 02 03 04 05 06B 06C 06F

- 01 SERIES**  
AR - ARTI STAR
- 02 CATEGORY**  
WM - Wall Mount
- 03 DRIVER**  
LID - Line Voltage
- 04 LIGHT SOURCE (TYPE)**  
LAG10 - Lamp MR16 Gu10

- 05 MATERIAL**  
AL - Aluminum  
BR - Brass
- 06B MOUNT**  
BC - Canopy
- 06C STYLE**  
CA - Cap A - 45° (With Weephole)  
CB - Cap B - 90° (With Weephole)  
CC - Cap C - Flush Lens  
CD - Cap D - 45°  
CE - Cap E - 90°  
CF - Cap F - Extended Flush Lens
- 06F SIZE**  
H03 - Height: 03"  
H06 - Height: 06"  
H12 - Height: 12"  
H18 - Height: 18"  
H24 - Height: 24"

**00-** **NON-** **-** **-** **WL00-** **-**  
 07 09 10A 10B 11 12

- 07 LIGHT SOURCE**  
00 - Not included

- 09 CONTROL**  
NON - Non-dimming
- 10A LENS**  
09 - Clear (Standard)  
12 - Soft Focus  
13 - Rectilinear
- 10B SHIELDING**  
00 - Not included (Standard)  
11 - Honeycomb Baffle
- 11 WIRING LENGTH**  
WL00 - Standard
- 12 FINISH**  
Standard Finishes  
BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER  
Premium Finishes  
CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,  
WIR, CAP, CRM, AQW, NBP  
Other - RAL  
RAL  
Other - Custom Color  
CUS  
Brass Finishes  
MAB, POB, MIT

**NOTE:** Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

# ARTI STAR - Wall Mount - Line Voltage - Lamp MR16 Gu10

## Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Manufactured in the USA with sustainable processes



Aim & Lock knuckle eliminates need for re-aiming & adjustments



Water-tight anti-siphon plug prevents moisture ingress from wireways



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life



Slip fit cap & high temp. silicone 'O' ring provides reliable water-tight seal



Solid billet fixture body provides unmatched durability and heat management

## Technical

**Driver:** Line Voltage

**Light Source (Type):** Lamp MR16 Gu10

**Material:** Aluminum, Brass

**Delivered Lumens (lm):** Array

**Control:** Non-dimming

**Mount:** Canopy

**Style:** Cap A - 45° (With Weephole), Cap B - 90° (With Weephole), Cap C - Flush Lens, Cap D - 45°, Cap E - 90°, Cap F - Extended Flush Lens

**Size:** Height: 03", Height: 06", Height: 12", Height: 18", Height: 24"

**Lens:** Soft Focus, Clear (Standard), Rectilinear

**Shielding:** Not included (Standard), Honeycomb Baffle

**Wiring Length:** Standard

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color, Brass Finishes

**Body:** Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet., Cast canopy., Machined canopy.

**Material Detail:** Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

**Aiming:** 180° vertical adjustment via 2 1/4" dia. knuckle. Mounting anchor base with set screws provides 360° horizontal rotation. Design withstands 73 lb. static load prior to movement for optical alignment. Fixture mounts via base plate.

**Light Source Detail:** GU10 Line Voltage MR16

**Hardware:** Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

**Sealing:** 'O' Ring provides water-tight seal.


**Finish Detail:** Powder coat or metal finish options available for brass material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

# ARTI STAR - Wall Mount - Line Voltage - Lamp MR16 Gu10

## Finishes


### STANDARD FINISHES

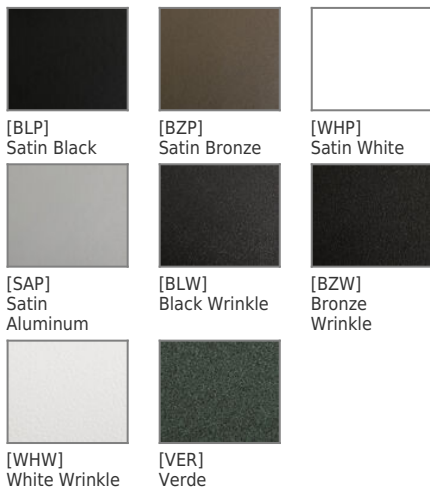

### PREMIUM FINISHES



### OTHER - RAL



### OTHER - CUSTOM COLOR



### BRASS FINISHES

