

# DENALI - Floodlight - Line Voltage - Lamp PAR20


IP66



### Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- 2D (.dwg)
- 2D (.dxf)
- IES Files (.zip)
- Installation Instructions (.pdf)

### Product Variant Examples

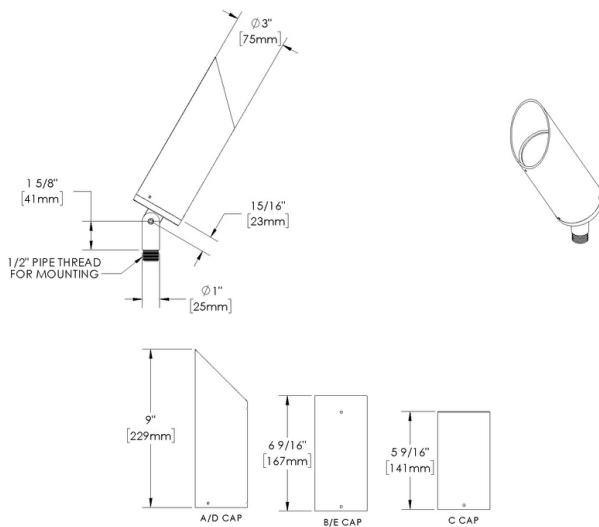

# DENALI - Floodlight - Line Voltage - Lamp PAR20

## Available Logic & Configurations

**DE-** 01    **FL-** 02    **LID-** 03    **LAP20-** 04    **AL-** 05    **TKM-** 06B    **CA-** 06C

**01 SERIES**

**DE** - DENALI

**02 CATEGORY**

**FL** - Floodlight

**03 DRIVER**

**LID** - Line Voltage

**04 LIGHT SOURCE (TYPE)**

**LAP20** - Lamp PAR20

**-**    **-**    **-**    **-**  
**07**    **10A**    **10B**    **12**

**07 LIGHT SOURCE**

- 00** - Not included
- 510** - 2700K CRI80 - 6.5W - 15°
- 511** - 2700K CRI80 - 6.5W - 25°
- 512** - 2700K CRI80 - 6.5W - 40°
- 513** - 3000K CRI80 - 6.5W - 15°
- 514** - 3000K CRI80 - 6.5W - 25°
- 515** - 3000K CRI80 - 6.5W - 40°
- 516** - 4000K CRI80 - 6.5W - 40°

**05 MATERIAL**

**AL** - Aluminum

**06B MOUNT**

**TKM** - Threaded Knuckle Mount

**06C STYLE**

**CA** - Cap A - 45° (With Weephole)

**10A LENS**

- 09** - Clear (Standard)
- 12** - Soft Focus
- 13** - Rectilinear

**10B SHIELDING**

- 00** - Not included (Standard)
- 11** - Honeycomb Baffle

**12 FINISH**

- Standard Finishes  
**BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER**
- Premium Finishes  
**CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,**  
**WIR, CAP, CRM, AQW, NBP**
- Other - RAL  
**RAL**
- Other - Custom Color  
**CUS**

**NOTE:** Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

# DENALI - Floodlight - Line Voltage - Lamp PAR20

## Technical

**Driver:** Line Voltage

**Light Source (Type):** Lamp PAR20

**Material:** Aluminum

**CCT (K):** 2700, 3000, 4000

**CRI:** 95

**Delivered Lumens (lm):** 526 - 599

**Beam Angle (°):** 15, 25, 40

**Mount:** Threaded Knuckle Mount

**Style:** Cap A - 45° (With Weephole)

**Lens:** Soft Focus, Clear (Standard), Rectilinear

**Shielding:** Not included (Standard), Honeycomb Baffle

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

**Body:** Unibody design, fully machined from solid billet.

**Material Detail:** Furnished in copper-free aluminum (6061-T6).

**Aiming:** 360HD Mounting System can adjust 180° vertically and rotate 360° horizontally. 'O' Ring helps maintain fixture position. Design withstands 73 lb. static load prior to movement for optical alignment with a ½" pipe thread for mounting.

**Light Source Detail:** 6.5W PAR20 Green Creative LED lamp, Title 20 compliant. Halogen sourced by others. For use with 120V. No transformer required.

**Hardware:** Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

**Sealing:** 'O' Ring provides water-tight seal.

**Finish Detail:** StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

# DENALI - Floodlight - Line Voltage - Lamp PAR20

## Finishes

### STANDARD FINISHES




### PREMIUM FINISHES



### OTHER - RAL



### OTHER - CUSTOM COLOR



# DENALI - Floodlight - Line Voltage - Lamp PAR20

## Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
510	SP - Spot	15	2700	95	>50	6.5	526	5000
511	NFL - Narrow Flood	25	2700	95	>50	6.5	532	1800
512	FL - Flood	40	2700	95	>50	6.5	546	1100
513	SP - Spot	15	3000	95	>50	6.5	550	5300
514	NFL - Narrow Flood	25	3000	95	>50	6.5	576	1900
515	FL - Flood	40	3000	95	>50	6.5	580	1200
516	FL - Flood	40	4000	95	>50	6.5	599	1300