

K2 - Floodlight - Line Voltage - Lamp PAR38




IP66



Downloads

- Product Images (.zip)
- 2D (.dwg)
- 2D (.dxf)
- IES Files (.zip)
- BIM - Revit (.zip)

Product Variant Examples

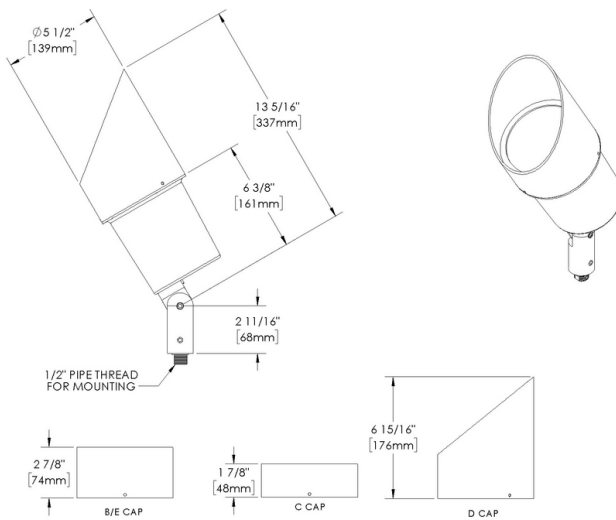

K2 - Floodlight - Line Voltage - Lamp PAR38

Available Logic & Configurations

K2- 01 **FL-** 02 **LID-** 03 **LAP38-** 04 **AL-** 05 **TKM-** 06B **CA-** 06C

01 SERIES

K2 - K2

02 CATEGORY

FL - Floodlight

03 DRIVER

LID - Line Voltage

04 LIGHT SOURCE (TYPE)

LAP38 - Lamp PAR38

- 07 **09-** 10A **-** 10B **WL00-** 11 **-** 12

07 LIGHT SOURCE

- 00** - Not included
- 530** - 2700K CRI80 - 15.5W - 15°
- 531** - 2700K CRI80 - 15.5W - 25°
- 532** - 2700K CRI80 - 15.5W - 40°
- 533** - 3000K CRI80 - 15.5W - 15°
- 534** - 3000K CRI80 - 15.5W - 25°
- 535** - 3000K CRI80 - 15.5W - 40°
- 536** - 4000K CRI80 - 15.5W - 40°

05 MATERIAL

AL - Aluminum

06B MOUNT

TKM - Threaded Knuckle Mount

06C STYLE

CA - Cap A - 45° (With Weephole)

10A LENS

09 - Clear (Standard)

10B SHIELDING

- 00** - Not included (Standard)
- 11** - Honeycomb Baffle

11 WIRING LENGTH

WL00 - Standard

12 FINISH

- Standard Finishes
BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER
- Premium Finishes
CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,
WIR, CAP, CRM, AQW, NBP
- Other - RAL
RAL
- Other - Custom Color
CUS

NOTE: Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

K2 - Floodlight - Line Voltage - Lamp PAR38

Technical

Driver: Line Voltage

Light Source (Type): Lamp PAR38

Material: Aluminum

CCT (K): 2700, 3000, 4000

CRI: 95

Delivered Lumens (lm): 1323 - 1490

Beam Angle (°): 15, 25, 40

Mount: Threaded Knuckle Mount

Style: Cap A - 45° (With Weephole)

Lens: Clear (Standard)

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

Material Detail: Furnished in copper-free aluminum (6061-T6).

Aiming: 360HD Mounting System can adjust 180° vertically and rotate 360° horizontally. 'O' Ring helps maintain fixture position. Design withstands 73 lb. static load prior to movement for optical alignment with a ½" pipe thread for mounting.

Light Source Detail: PAR38 line voltage halogen lamps - sourced by others.

Hardware: Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

Sealing: 'O' Ring provides water-tight seal.

Finish Detail: StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

K2 - Floodlight - Line Voltage - Lamp PAR38

Finishes

STANDARD FINISHES




PREMIUM FINISHES



OTHER - RAL



OTHER - CUSTOM COLOR



K2 - Floodlight - Line Voltage - Lamp PAR38

Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
530	SP - Spot	15	2700	95	>50	15.5	1323	14000
531	NFL - Narrow Flood	25	2700	95	>50	15.5	1351	6750
532	FL - Flood	40	2700	95	>50	15.5	1346	2800
533	SP - Spot	15	3000	95	>50	15.5	1437	14700
534	NFL - Narrow Flood	25	3000	95	>50	15.5	1399	7000
535	FL - Flood	40	3000	95	>50	15.5	1424	2900
536	FL - Flood	40	4000	95	>50	15.5	1490	3000