

# LITESTICK - Bollard - Low Voltage - LED High-Power - Round - T - Pipe PI1 - 18" Stake





IP66

### Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- 2D (.dwg)
- 2D (.dxf)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

### Product Variant Examples

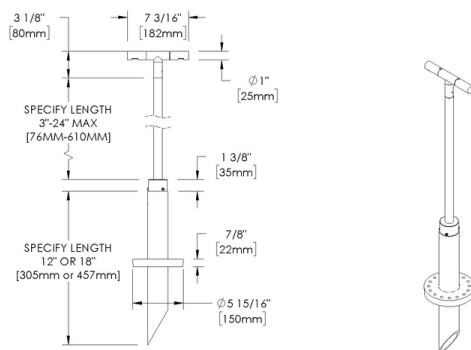

# LITESTICK - Bollard - Low Voltage - LED High-Power - Round - T - Pipe PI1 - 18" Stake

## Available Logic & Configurations

<b>LT-</b> 01	<b>BO-</b> 02	<b>LOD-</b> 03	<b>LHP-</b> 04	<b>AL-</b> 05	<b>ROT-</b> 06A	<b>PI1-S18-</b> 06B	<b>-</b> 06F		
<b>01 SERIES</b> LT - LITESTICK <b>02 CATEGORY</b> BO - Bollard <b>03 DRIVER</b> LOD - Low Voltage <b>04 LIGHT SOURCE (TYPE)</b> LHP - LED High-Power				<b>05 MATERIAL</b> AL - Aluminum <b>06A SHAPE</b> ROT - Round - T <b>06B MOUNT</b> PI1-S18 - Pipe PI1 - 18" Stake <b>06F SIZE</b> H03 - Height: 03" H06 - Height: 06" H12 - Height: 12" H18 - Height: 18" H24 - Height: 24"					
<b>-</b> 07	<b>WL00-</b> 11	<b>-</b> 12							
<b>07 LIGHT SOURCE</b> e70 - 2700K CRI80 - 3W e71 - 3000K CRI80 - 3W e72 - 4000K CRI80 - 3W e73 - Amber - 3W e85 - 2700K CRI90 - 3W (55 - 97 lm) e86 - 3000K CRI90 - 3W (58 - 102 lm) e87 - 3500K CRI80 - 3W			<b>11 WIRING LENGTH</b> WL00 - Standard <b>12 FINISH</b> Standard Finishes BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER Premium Finishes CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS, WIR, CAP, CRM, AQW, NBP Other - RAL RAL Other - Custom Color CUS						

**NOTE:** Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

# LITESTICK - Bollard - Low Voltage - LED High-Power - Round - T - Pipe PI1 - 18" Stake

## Features



Manufactured in the USA with sustainable processes



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life

**WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.**

## Technical

**Driver:** Low Voltage

**Light Source (Type):** LED High-Power

**Material:** Aluminum

**CCT (K):** Amber, 2700, 3500, 3000, 4000

**CRI:** 80

**Input Power (W):** 3

**Delivered Lumens (lm):** 31 - 36

**Beam Angle (°):** 360h x 270v

**Shape:** Round - T

**Mount:** Pipe PI1 - 18" Stake

**Size:** Height: 03", Height: 06", Height: 12", Height: 18", Height: 24"

**Wiring Length:** Standard

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

**Body:** Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

**Material Detail:** Furnished in copper-free aluminum (6061-T6).

**Light Source Detail:** High power LEDs modular design with electrical disconnects., Non-dimming.

**Hardware:** Tamper-resistant, stainless steel hardware.

**Sealing:** 'O' Ring provides water-tight seal.

**Note:** Stability Flange included.

**Finish Detail:** StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

# LITESTICK - Bollard - Low Voltage - LED High-Power - Round - T - Pipe PI1 - 18" Stake

## Finishes

### STANDARD FINISHES



### PREMIUM FINISHES



### OTHER - RAL



### OTHER - CUSTOM COLOR



# LITESTICK - Bollard - Low Voltage - LED High-Power - Round - T - Pipe PI1 - 18" Stake

## Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e70	-	360h x 270v	2700	80	>15	3	31	
e70	-	360h x 270v	2700	80	>15	3	31	
e71	-	360h x 270v	3000	80	>15	3	32	
e71	-	360h x 270v	3000	80	>15	3	32	
e72	-	360h x 270v	4000	80	>15	3	36	
e72	-	360h x 270v	4000	80	>15	3	36	
e73	-	360h x 270v	Amber			3		
e73	-	360h x 270v	Amber			3		
e87	-	360h x 270v	3500	80	>15	3		