

LITESTICK - Bollard - Low Voltage - LED High-Power - Round - L - Pipe PI1 - 18" Adjustable Stem



IP66



Downloads


[Product Images \(.zip\)](#)

[Technical Drawing \(.zip\)](#)

[BIM - Revit \(.zip\)](#)

[Installation Instructions \(.pdf\)](#)

Product Variant Examples

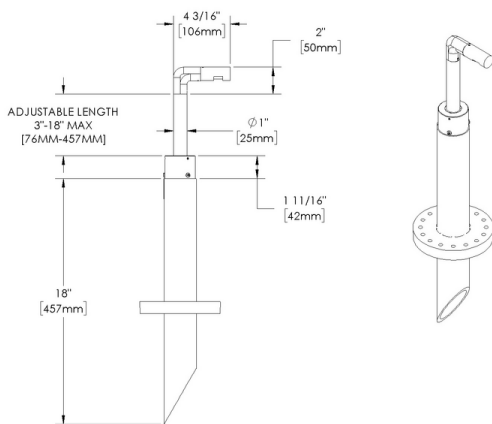

LITESTICK - Bollard - Low Voltage - LED High-Power - Round - L - Pipe PI1 - 18" Adjustable Stem

Features



Manufactured in the USA with sustainable processes



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life

WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.

Technical

Driver: Low Voltage

Light Source (Type): LED High-Power

Material: Aluminum

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80

Input Power (W): 3

Delivered Lumens (lm): 31 - 36

Beam Angle (°): 360h x 270v

Shape: Round - L

Mount: Pipe PI1 - 18" Adjustable Stem

Size: Height: 18"

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

Material Detail: Furnished in copper-free aluminum (6061-T6).

Light Source Detail: High power LEDs modular design with electrical disconnects., Non-dimming.

Hardware: Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

Sealing: 'O' Ring provides water-tight seal.

Note: Stability Flange included.

Finish Detail: StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

LITESTICK - Bollard - Low Voltage - LED High-Power - Round - L - Pipe PI1 - 18" Adjustable Stem

Finishes

STANDARD FINISHES



PREMIUM FINISHES



OTHER - RAL



OTHER - CUSTOM COLOR



LITESTICK - Bollard - Low Voltage - LED High-Power - Round - L - Pipe PI1 - 18" Adjustable Stem

Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e70	-	360h x 270v	2700	80	>15	3	31	
e70	-	360h x 270v	2700	80	>15	3	31	
e71	-	360h x 270v	3000	80	>15	3	32	
e71	-	360h x 270v	3000	80	>15	3	32	
e72	-	360h x 270v	4000	80	>15	3	36	
e72	-	360h x 270v	4000	80	>15	3	36	
e73	-	360h x 270v	Amber			3		
e73	-	360h x 270v	Amber			3		
e87	-	360h x 270v	3500	80	>15	3		