

# LITESTICK - Bollard - Line Voltage Via Transformer - LED High-Power - Round - L - Power Pipe PP1 - 18" Junction Box




IP66

**Downloads**

- Product Images (.zip)
- Technical Drawing (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

**Product Variant Examples**

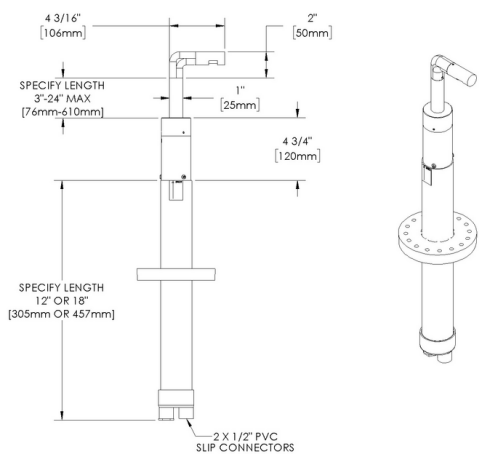

# LITESTICK - Bollard - Line Voltage Via Transformer - LED High-Power - Round - L - Power Pipe PP1 - 18" Junction Box

## Available Logic & Configurations

<b>LT-</b> 01	<b>BO-</b> 02	<b>LIT-</b> 03	<b>LHP-</b> 04	<b>AL-</b> 05	<b>ROL-</b> 06A	<b>PP1-J18-</b> 06B	<b>___-</b> 06F
<b>01 SERIES</b> LT - LITESTICK <b>02 CATEGORY</b> BO - Bollard <b>03 DRIVER</b> LIT - Line Voltage Via Transformer <b>04 LIGHT SOURCE (TYPE)</b> LHP - LED High-Power				<b>05 MATERIAL</b> AL - Aluminum <b>06A SHAPE</b> ROL - Round - L <b>06B MOUNT</b> PP1-J18 - Power Pipe PP1 - 18" Junction Box <b>06F SIZE</b> H03 - Height: 03" H06 - Height: 06" H12 - Height: 12" H18 - Height: 18" H24 - Height: 24"			
<b>___-</b> 07	<b>NON-</b> 09	<b>WL00-</b> 11	<b>___-</b> 12				
<b>07 LIGHT SOURCE</b> e70 - 2700K CRI80 - 3W e71 - 3000K CRI80 - 3W e72 - 4000K CRI80 - 3W e73 - Amber - 3W e85 - 2700K CRI90 - 3W (55 - 97 lm) e86 - 3000K CRI90 - 3W (58 - 102 lm) e87 - 3500K CRI80 - 3W				<b>09 CONTROL</b> NON - Non-dimming <b>11 WIRING LENGTH</b> WL00 - Standard <b>12 FINISH</b> Standard Finishes BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER Premium Finishes CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS, WIR, CAP, CRM, AQW, NBP Other - RAL RAL Other - Custom Color CUS			

**NOTE:** Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

# LITESTICK - Bollard - Line Voltage Via Transformer - LED High-Power - Round - L - Power Pipe PP1 - 18" Junction Box

## Features



Manufactured in the USA with sustainable processes



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life

## Technical

**Driver:** Line Voltage Via Transformer

**Light Source (Type):** LED High-Power

**Material:** Aluminum

**CCT (K):** Amber, 2700, 3500, 3000, 4000

**CRI:** 80

**Input Power (W):** 3

**Delivered Lumens (lm):** 31 - 36

**Beam Angle (°):** 360h x 270v

**Control:** Non-dimming

**Shape:** Round - L

**Mount:** Power Pipe PP1 - 18" Junction Box

**Size:** Height: 03", Height: 06", Height: 12", Height: 18", Height: 24"

**Wiring Length:** Standard

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

**Body:** Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

**Material Detail:** Furnished in copper-free aluminum (6061-T6).

**Light Source Detail:** High power LEDs modular design with electrical disconnects., Non-dimming.

**Hardware:** Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

**Sealing:** 'O' Ring provides water-tight seal.

**Note:** Stability Flange included., Transformer included.

**Finish Detail:** StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

# LITESTICK - Bollard - Line Voltage Via Transformer - LED High-Power - Round - L - Power Pipe PP1 - 18" Junction Box

## Finishes

### STANDARD FINISHES




### PREMIUM FINISHES



### OTHER - RAL



### OTHER - CUSTOM COLOR



# LITESTICK - Bollard - Line Voltage Via Transformer - LED High-Power - Round - L - Power Pipe PP1 - 18" Junction Box

## Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e70	-	360h x 270v	2700	80	>15	3	31	
e70	-	360h x 270v	2700	80	>15	3	31	
e71	-	360h x 270v	3000	80	>15	3	32	
e71	-	360h x 270v	3000	80	>15	3	32	
e72	-	360h x 270v	4000	80	>15	3	36	
e72	-	360h x 270v	4000	80	>15	3	36	
e73	-	360h x 270v	Amber			3		
e73	-	360h x 270v	Amber			3		
e87	-	360h x 270v	3500	80	>15	3		