


RIO - Pole Top - Line Voltage - LED High-Power

(formerly Rio Pole Top / PT-RI)



NEW

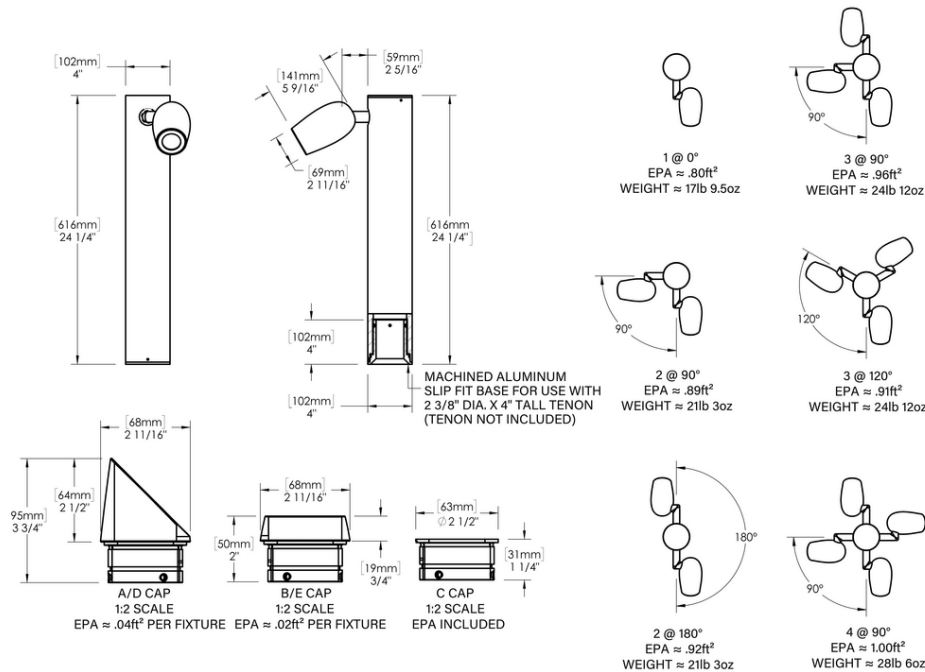

Finishes

BLP	BZP	WHP	SAP	BLW
BZW	WHW	VER	CMG	RMG
AMG	TXF	BCM	BGE	WCP
OCP	HUG	ABP	BPP	SDS
WIR	CAP	CRM	AQW	NBP
RAL	CUSTOM			
RAL	CUS			

For more detailed information and visuals regarding our finishes, visit www.bklighting.com/finishes

RIO - Pole Top - Line Voltage - LED High-Power

(formerly Rio Pole Top / PT-RI)

B-K
LIGHTING



IP66

Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Optional hardware free fixture body and cap



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Manufactured in the USA with sustainable processes



Aim & Lock knuckle eliminates need for re-aiming & adjustments



Water-tight anti-siphon plug prevents moisture ingress from wireways



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life



Slip fit cap & high temp. silicone 'O' ring provides reliable water-tight seal



Solid billet fixture body provides unmatched durability and heat management



Integrated knuckle design provides 360° horizontal rotation and vertical adjustment

Technical

Driver: Line Voltage

Light Source (Type): LED High-Power

Material: Aluminum

CCT (K): 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 14

Delivered Lumens (lm): 577 - 851

Beam Angle (°): 6, 13, 23, 34, 56

Control: 0-10V (120V, 277V), ELV Dimming (For use with Electronic Low Voltage Dimmer. 120V only.), INC Dimming (For use with Incandescent Dimmer. 120V only.)

Shape: Round

Style: Cap A - 45° (With Weephole), Cap B - 90° (With Weephole), Cap C - Flush Lens, Cap D - 45°, Cap E - 90°

Version: Single, 2 Fixtures @ 180°, 2 Fixtures @ 90°, 2 Fixtures - Spiral, 2 Fixtures, 3 Fixtures @ 120°, 3 Fixtures @ 90°, 3 Fixtures - Spiral, 3 Fixtures - Vertical, 4 Fixtures @ 90°

Input Voltage: 120V, 277V

Lens: Clear (Standard), Rectilinear

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

Option: Tamper Resistant

IP Rating: IP66 rated

Installation Fixture: Machined aluminum slip fit base for use with 2 3/8" dia. X 4" tall tenon (Tenon not included)

EPA (ft2): 0.8 - 1.18

Body: Unibody design with enclosed, water-proof wireway, integral heat sink, fully machined from solid billet, anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

Material Detail: Furnished in copper-free aluminum (6061-T6).

Aiming: 360HD Knuckle Mounting System can adjust 180° vertically and rotate 360° horizontally. 'O' Ring helps maintain fixture position. Design withstands 73 lb. static load prior to movement for optical alignment with a 1/2" pipe thread for mounting.

Light Source Detail: High power LEDs modular design with electrical disconnects.

Optics: Tamper Resistant required for Very Narrow Spot (VNSP) optic., Interchangeable optics permit changes in the field.

Hardware: Tamper-resistant, stainless steel hardware. Luminaire hardware is black oxide treated for additional corrosion resistance.

Sealing: High temperature silicone 'O' Ring in fixture knuckle provides water-tight seal at joint., Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

Finish Detail: StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

Certification: Made in USA, UL Listed, Suitable for Wet Locations

B-K LIGHTING AMERICAN MADE + EMPLOYEE OWNED | 40429 Brickyard Drive, Madera, CA 93636 | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 09/21/2026

RIO - Pole Top - Line Voltage - LED High-Power
(formerly Rio Pole Top / PT-RI)



Source to Lens Distance (in): 0.95

Light Source

Configure your product to display exact performance values

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
--------------	-------	------------	---------	-----	-----------------	-----------------------	------

Without selecting your configuration

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
e130	VNSP - Very Narrow Spot	6°	2700	80	14	781	37868
e130	NSP - Narrow Spot	13°	2700	80	14	781	11467
e130	SP - Spot	23°	2700	80	14	698	2874
e130	MFL - Medium Flood	34°	2700	80	14	704	1631
e130	WFL - Wide Flood	56°	2700	80	14	752	822
e131	VNSP - Very Narrow Spot	6°	3000	80	14	774	37498
e131	NSP - Narrow Spot	13°	3000	80	14	803	11355
e131	SP - Spot	23°	3000	80	14	692	2846
e131	MFL - Medium Flood	34°	3000	80	14	697	1615
e131	WFL - Wide Flood	56°	3000	80	14	745	814
e132	VNSP - Very Narrow Spot	6°	3500	80	14	819	39718
e132	NSP - Narrow Spot	13°	3500	80	14	851	12027
e132	SP - Spot	23°	3500	80	14	733	3015
e132	MFL - Medium Flood	34°	3500	80	14	739	1710
e132	WFL - Wide Flood	56°	3500	80	14	789	862
e133	VNSP - Very Narrow Spot - Rectilinear Lens		4000	80	14	733	5884
e133	VNSP - Very Narrow Spot	6°	4000	80	14	808	39163
e133	NSP - Narrow Spot	13°	4000	80	14	839	11859
e133	SP - Spot	23°	4000	80	14	722	2973
e133	MFL - Medium Flood	34°	4000	80	14	728	1687
e133	WFL - Wide Flood	56°	4000	80	14	778	850
e134	VNSP - Very Narrow Spot	6°	2700	90	14	646	31302
e134	NSP - Narrow Spot	13°	2700	90	14	670	9479
e134	SP - Spot	23°	2700	90	14	577	2376
e134	MFL - Medium Flood	34°	2700	90	14	582	1348
e134	WFL - Wide Flood	56°	2700	90	14	622	679
e135	VNSP - Very Narrow Spot	6°	3000	90	14	709	34355
e135	NSP - Narrow Spot	13°	3000	90	14	736	10403
e135	SP - Spot	23°	3000	90	14	634	2608
e135	MFL - Medium Flood	34°	3000	90	14	639	1480
e135	WFL - Wide Flood	56°	3000	90	14	682	745
e136	VNSP - Very Narrow Spot	6°	3500	90	14	747	36204
e136	NSP - Narrow Spot	13°	3500	90	14	775	10963
e136	SP - Spot	23°	3500	90	14	668	2748
e136	MFL - Medium Flood	34°	3500	90	14	673	1559
e136	WFL - Wide Flood	56°	3500	90	14	719	785
e137	NSP - Narrow Spot - Rectilinear Lens		4000	90	14	700	2444
e137	VNSP - Very Narrow Spot	6°	4000	90	14	740	35880
e137	NSP - Narrow Spot	13°	4000	90	14	768	10865
e137	SP - Spot	23°	4000	90	14	662	2723
e137	MFL - Medium Flood	34°	4000	90	14	667	1545
e137	WFL - Wide Flood	56°	4000	90	14	712	778