

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Symmetrical Optics



UPGRADED



Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- IES Files (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

Product Variant Examples

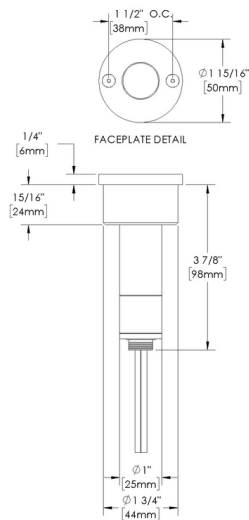

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Symmetrical Optics

Available Logic & Configurations

VS- **CR-** **LOD-** **LHP-** **-** **RO-** **CD-** **FSD-** **MIC-OSYM-**
 01 02 03 04 05 06A 06B 06C 06D

01 SERIES

VS - VERSA STAR

02 CATEGORY

CR - Ceiling Recessed

03 DRIVER

LOD - Low Voltage

04 LIGHT SOURCE (TYPE)

LHP - LED High-Power

05 MATERIAL

AL - Aluminum

BR - Brass

SS - Stainless Steel

06A SHAPE

RO - Round

06B MOUNT

CD - Core Drill

06C STYLE

FSD - Faceplate: Standard

06D VERSION

MIC-OSYM - Micro - Symmetrical Optics

- **-** **NON-** **-** **-** **-** **-**
 07 08 09 10A 10B 11 12

07 LIGHT SOURCE

e70 - 2700K CRI80 - 3W

e71 - 3000K CRI80 - 3W

e72 - 4000K CRI80 - 3W

e73 - Amber - 3W

e85 - 2700K CRI90 - 3W

e86 - 3000K CRI90 - 3W

e87 - 3500K CRI80 - 3W

08 OPTIC

SP - Spot

SP2 - Spot

NFL - Narrow Flood

09 CONTROL

NON - Non-dimming

10A LENS

12 - Soft Focus

13 - Rectilinear

10B SHIELDING

00 - Not included (Standard)

11 - Honeycomb Baffle

11 WIRING LENGTH

WL00 - Standard

WL25 - 25 Ft Leads

12 FINISH

Standard Finishes

BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER

Premium Finishes

CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,

WIR, CAP, CRM, AQW, NBP

Other - RAL

RAL

Other - Custom Color

CUS

Brass Finishes

MAB, POB, MIT

Stainless Steel Finishes

MAS, POS

NOTE: Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Symmetrical Optics

Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware



Machined solid billet faceplate provides unmatched strength and durability




Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Easily replaceable modular components reduce waste and extend fixture life



Solid billet fixture body provides unmatched durability and heat management

WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.

Technical

Driver: Low Voltage

Light Source (Type): LED High-Power

Material: Aluminum, Brass, Stainless Steel

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 3

Delivered Lumens (lm): Array

Control: Non-dimming

Shape: Round

Mount: Core Drill

Style: Faceplate: Standard

Version: Micro - Symmetrical Optics

Lens: Soft Focus, Rectilinear

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color, Brass Finishes, Stainless Steel Finishes

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet., Unibody design with enclosed, water-proof wireway, integral heat sink, fully machined from solid billet, anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

Material Detail: Furnished in stainless steel (304)., Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

Light Source Detail: High power LEDs modular design with electrical disconnects.

Optics: Interchangeable optics permit changes in the field.

Hardware: Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

Sealing: 'O' Ring provides water-tight seal.

Finish Detail: Powder coat or metal finish options available for brass material., Metal finish option only for stainless steel material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Symmetrical Optics

Finishes

STANDARD FINISHES




PREMIUM FINISHES




OTHER - RAL




OTHER - CUSTOM COLOR



BRASS FINISHES

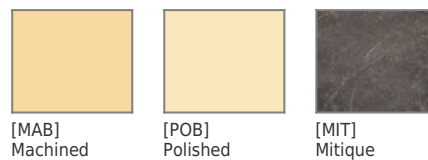

STAINLESS STEEL FINISHES



MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Symmetrical Optics

(Brass)

(Brass)

(Stainless Steel)

(Stainless Steel)

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Symmetrical Optics

Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e70	NFL - Narrow Flood	28	2700	80	>15	3		
e70	SP - Spot	28	2700	80	>15	3		
e70	SP2 - Spot	28	2700	80	>15	3		
e71	NFL - Narrow Flood	28	3000	80	>15	3		
e71	SP - Spot	28	3000	80	>15	3		
e71	SP2 - Spot	28	3000	80	>15	3		
e72	NFL - Narrow Flood	28	4000	80	>15	3		
e72	SP - Spot	28	4000	80	>15	3		
e72	SP2 - Spot	28	4000	80	>15	3		
e73	NFL - Narrow Flood	28	Amber			3		
e73	SP - Spot	28	Amber			3		
e73	SP2 - Spot	28	Amber			3		
e85	NFL - Narrow Flood	28	2700	90	>50	3		
e85	SP - Spot	28	2700	90	>50	3		
e85	SP2 - Spot	28	2700	90	>50	3		
e86	NFL - Narrow Flood	28	3000	90	>50	3		
e86	SP - Spot	28	3000	90	>50	3		
e86	SP2 - Spot	28	3000	90	>50	3		
e87	NFL - Narrow Flood	28	3500	80	>15	3		
e87	SP - Spot	28	3500	80	>15	3		
e87	SP2 - Spot	28	3500	80	>15	3		