

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Asymmetrical Optics



UPGRADED



Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- IES Files (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

Product Variant Examples

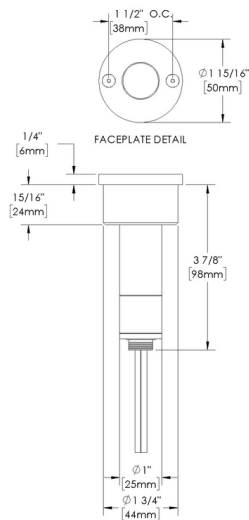

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Asymmetrical Optics

Available Logic & Configurations

VS- 01	CR- 02	LOD- 03	LHP- 04	- 05	RO- 06A	CD- 06B	FSD- 06C	MIC-OASY- 06D
01 SERIES VS - VERSA STAR	02 CATEGORY CR - Ceiling Recessed	03 DRIVER LOD - Low Voltage	04 LIGHT SOURCE (TYPE) LHP - LED High-Power		05 MATERIAL AL - Aluminum BR - Brass SS - Stainless Steel	06A SHAPE RO - Round	06B MOUNT CD - Core Drill	06C STYLE FSD - Faceplate: Standard
				- 07	ASY- 08	NON- 09	09- 10A	- 10B
				07 LIGHT SOURCE e70 - 2700K CRI80 - 3W e71 - 3000K CRI80 - 3W e72 - 4000K CRI80 - 3W e73 - Amber - 3W e85 - 2700K CRI90 - 3W e86 - 3000K CRI90 - 3W e87 - 3500K CRI80 - 3W	08 OPTIC ASY - Asymmetrical	09 CONTROL NON - Non-dimming	10A LENS 09 - Clear (Standard)	10B SHIELDING 00 - Not included (Standard) 11 - Honeycomb Baffle
							11 WIRING LENGTH WL00 - Standard	12 FINISH Standard Finishes BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER Premium Finishes CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS, WIR, CAP, CRM, AQW, NBP Other - RAL RAL Other - Custom Color CUS Brass Finishes MAB, POB, MIT Stainless Steel Finishes MAS, POS

NOTE: Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Asymmetrical Optics

Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware



Machined solid billet faceplate provides unmatched strength and durability




Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Easily replaceable modular components reduce waste and extend fixture life



Solid billet fixture body provides unmatched durability and heat management

WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.

Technical

Driver: Low Voltage

Light Source (Type): LED High-Power

Material: Aluminum, Brass, Stainless Steel

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 3

Delivered Lumens (lm): Array

Control: Non-dimming

Shape: Round

Mount: Core Drill

Style: Faceplate: Standard

Version: Micro - Asymmetrical Optics

Lens: Clear (Standard)

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color, Brass Finishes, Stainless Steel Finishes

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet., Unibody design with enclosed, water-proof wireway, integral heat sink, fully machined from solid billet, anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

Material Detail: Furnished in stainless steel (304)., Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

Light Source Detail: High power LEDs modular design with electrical disconnects.

Optics: Interchangeable optics permit changes in the field.

Hardware: Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

Sealing: 'O' Ring provides water-tight seal.

Finish Detail: Powder coat or metal finish options available for brass material., Metal finish option only for stainless steel material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Asymmetrical Optics

Finishes


STANDARD FINISHES




PREMIUM FINISHES




OTHER - RAL




OTHER - CUSTOM COLOR



BRASS FINISHES

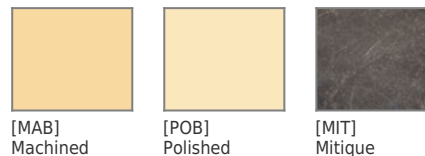

STAINLESS STEEL FINISHES



MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Asymmetrical Optics

(Brass)

(Brass)

(Stainless Steel)

(Stainless Steel)

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Micro - Asymmetrical Optics

Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e70	ASY - Asymmetrical		2700	80	>15	3		
e71	ASY - Asymmetrical		3000	80	>15	3		
e72	ASY - Asymmetrical		4000	80	>15	3		
e73	ASY - Asymmetrical		Amber			3		
e85	ASY - Asymmetrical		2700	90	>50	3		
e86	ASY - Asymmetrical		3000	90	>50	3		
e87	ASY - Asymmetrical		3500	80	>15	3		