

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

UPGRADED





IP66

Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- 2D (.dwg)
- 2D (.dxf)
- IES Files (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

Product Variant Examples

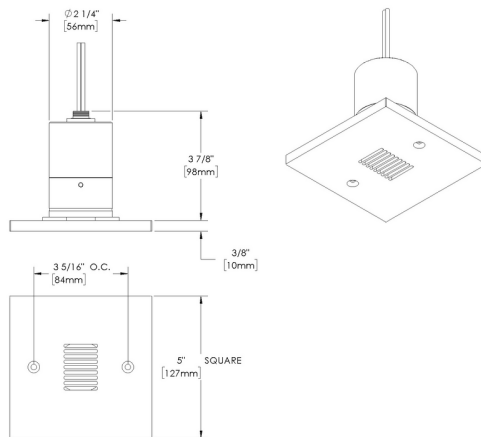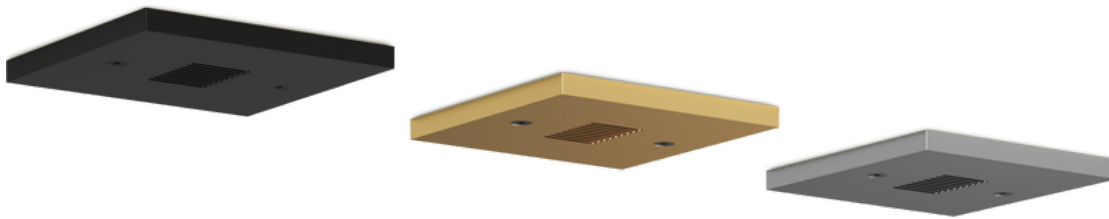

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

Available Logic & Configurations

VS- **CR-** **LOD-** **LHP-** **___-** **SQ-** **CD-** **FLDG-**
 01 02 03 04 05 06A 06B 06C

01 SERIES

VS - VERSA STAR

02 CATEGORY

CR - Ceiling Recessed

03 DRIVER

LOD - Low Voltage

04 LIGHT SOURCE (TYPE)

LHP - LED High-Power

___- **___-** **___-** **___-** **___-** **___-**
 07 08 10A 10B 11 12

07 LIGHT SOURCE

- e64** - 2700K CRI80 - 7W
- e65** - 3000K CRI80 - 7W
- e66** - 4000K CRI80 - 7W
- e74** - Amber - 7W
- e79** - 2700K CRI90 - 7W
- e80** - 3000K CRI90 - 7W
- e81** - 3500K CRI80 - 7W

08 OPTIC

- NSP** - Narrow Spot (13°)
- SP** - Spot (16°)
- SP2** - Spot (23°)
- MFL** - Medium Flood (31°)

05 MATERIAL

- AL** - Aluminum
- BR** - Brass
- SS** - Stainless Steel

06A SHAPE

SQ - Square

06B MOUNT

CD - Core Drill

06C STYLE

FLDG - Faceplate: Louvered - Pattern G - 0° Angle - Rectangular

10A LENS

- 12** - Soft Focus
- 13** - Rectilinear

10B SHIELDING

- 00** - Not included (Standard)
- 11** - Honeycomb Baffle

11 WIRING LENGTH

- WL00** - Standard
- WL25** - 25 Ft Leads

12 FINISH

- Standard Finishes
BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER
- Premium Finishes
CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,
WIR, CAP, CRM, AQW, NBP
- Other - RAL
RAL
- Other - Custom Color
CUS
- Brass Finishes
MAB, POB, MIT
- Stainless Steel Finishes
MAS, POS

NOTE: Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware



Machined solid billet faceplate provides unmatched strength and durability



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Easily replaceable modular components reduce waste and extend fixture life



Solid billet fixture body provides unmatched durability and heat management

WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.

Technical

Driver: Low Voltage

Light Source (Type): LED High-Power

Material: Aluminum, Brass, Stainless Steel

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 7

Delivered Lumens (lm): 112 - 284

Beam Angle (°): 13, 16, 23, 31

Shape: Square

Mount: Core Drill

Style: Faceplate: Louvered - Pattern G - 0° Angle - Rectangular

Lens: Soft Focus, Rectilinear

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color, Brass Finishes, Stainless Steel Finishes

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet., Unibody design with enclosed, water-proof wireway, integral heat sink, fully machined from solid billet, anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

Material Detail: Furnished in stainless steel (304)., Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

Light Source Detail: High power LEDs modular design with electrical disconnects.

Optics: Interchangeable optics permit changes in the field.

Hardware: Tamper-resistant, stainless steel hardware. Hardware is black oxide treated for additional corrosion resistance.

Sealing: 'O' Ring provides water-tight seal.

Finish Detail: Powder coat or metal finish options available for brass material., Metal finish option only for stainless steel material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

Finishes

STANDARD FINISHES



[BLP] Satin Black



[BZP] Satin Bronze



[WHP] Satin White



[SAP] Satin Aluminum



[BLW] Black Wrinkle



[BZW] Bronze Wrinkle



[WHW] White Wrinkle



[VER] Verde

PREMIUM FINISHES



[CMG] Cascade Mountain Granite



[SMG] Sierra Mountain Granite



[RMG] Rocky Mountain Granite



[AMG] Aleutian Mountain Granite



[TXF] Textured Forest



[BCM] Black Chrome



[BGE] Beige



[WCP] Weathered Copper



[OCP] Old Copper



[HUG] Hunter Green



[ABP] Antique Brass Powder



[BPP] Brown Patina Powder



[SDS] Sonoran Desert Sandstone




[WIR] Weathered Iron



[CAP] Clear Anodized Powder



[CRM] Cream



[AQW] Antique White



[NBP] Natural Brass Powder

OTHER - RAL



[RAL] RAL Color

OTHER - CUSTOM COLOR



[CUS] Custom Color

BRASS FINISHES



[MAB] Machined (Brass)



[POB] Polished (Brass)



[MIT] Mitique

STAINLESS STEEL FINISHES



[MAS] Machined (Stainless Steel)



[POS] Polished (Stainless Steel)

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e64	NSP - Narrow Spot	13	2700	80	>15	7	247	
e64	SP - Spot	16	2700	80	>15	7	215	
e64	SP2 - Spot	23	2700	80	>15	7	199	
e64	MFL - Medium Flood	31	2700	80	>15	7	112	
e65	NSP - Narrow Spot	13	3000	80	>15	7	253	
e65	SP - Spot	16	3000	80	>15	7	220	
e65	SP2 - Spot	23	3000	80	>15	7	204	
e65	MFL - Medium Flood	31	3000	80	>15	7	115	
e66	NSP - Narrow Spot	13	4000	80	>15	7	284	
e66	SP - Spot	16	4000	80	>15	7	247	
e66	SP2 - Spot	23	4000	80	>15	7	229	
e66	MFL - Medium Flood	31	4000	80	>15	7	129	
e74	NSP - Narrow Spot	13	Amber			7		
e74	SP - Spot	16	Amber			7		
e74	SP2 - Spot	23	Amber			7		
e74	MFL - Medium Flood	31	Amber			7		
e79	NSP - Narrow Spot	13	2700	90	>50	7		
e79	SP - Spot	16	2700	90	>50	7		
e79	SP2 - Spot	23	2700	90	>50	7		
e79	MFL - Medium Flood	31	2700	90	>50	7		
e80	NSP - Narrow Spot	13	3000	90	>50	7		
e80	SP - Spot	16	3000	90	>50	7		
e80	SP2 - Spot	23	3000	90	>50	7		
e80	MFL - Medium Flood	31	3000	90	>50	7		
e81	NSP - Narrow Spot	13	3500	80	>15	7		
e81	SP - Spot	16	3500	80	>15	7		
e81	SP2 - Spot	23	3500	80	>15	7		
e81	MFL - Medium Flood	31	3500	80	>15	7		