


MINI YUKON - Wall Recessed - Line Voltage - LED High-Power - Indirect - Mini

NEW



IP66

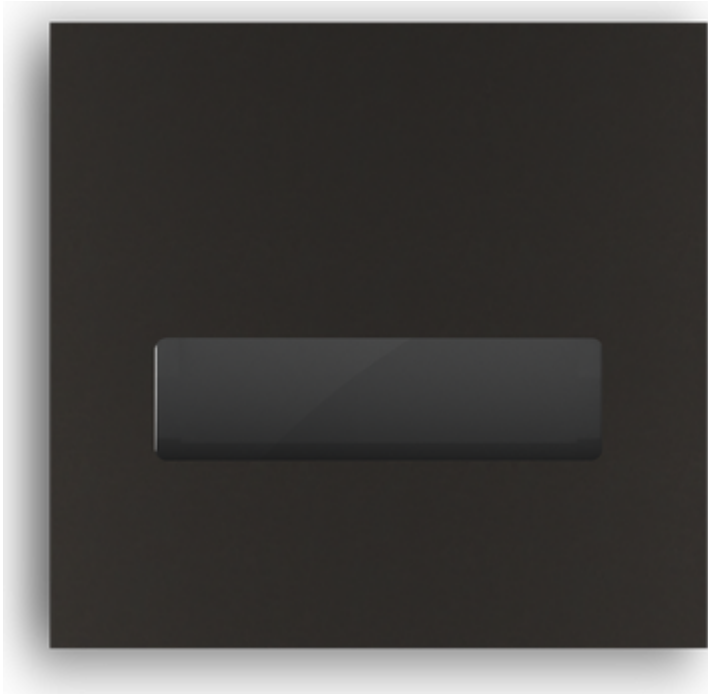

Downloads

- Product Images (.zip)
- Technical Drawing (.zip)
- IES Files (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

Product Variant Examples



MINI YUKON - Wall Recessed - Line Voltage - LED High-Power - Indirect - Mini

Available Logic & Configurations

YK- 01 **WR-** 02 **LID-** 03 **LHP-** 04 **AL-** 05 **RH-** 06A **JB-** 06B **FSD-BCU-** 06C **IN-MIN-** 06D **-** 06E

01 SERIES

YK - YUKON

02 CATEGORY

WR - Wall Recessed

03 DRIVER

LID - Line Voltage

04 LIGHT SOURCE (TYPE)

LHP - LED High-Power

05 MATERIAL

AL - Aluminum

06A SHAPE

RH - Rectangular Horizontal

06B MOUNT

JB - Junction Box

06C STYLE

FSD-BCU - Faceplate: Standard - Backplate: Curved

06D VERSION

IN-MIN - Indirect - Mini

06E INPUT VOLTAGE

120 - 120V

277 - 277V

- 07 **-** 08 **-** 09 **WL00-** 11 **-** 12 **-** 13

07 LIGHT SOURCE

- e190** - 2700K CRI80 - 8W - Type II - Wide Throw (322 - 322 lm)
- e191** - 3000K CRI80 - 8W - Type II - Forward Throw (372 - 372 lm)
- e192** - 3500K CRI80 - 8W - Type II - Forward Throw (364 - 364 lm)
- e193** - 4000K CRI80 - 8W - Type II - Forward Throw (396 - 396 lm)
- e194** - 2700K CRI90 - 8W - Type II - Forward Throw (320 - 320 lm)
- e195** - 3000K CRI90 - 8W - Type II - Forward Throw (301 - 301 lm)
- e196** - 2700K CRI80 - 8W - Type II - Forward Throw (429 - 429 lm)
- e197** - 3000K CRI80 - 8W - Type II - Forward Throw (496 - 496 lm)
- e198** - 3500K CRI80 - 8W - Type II - Forward Throw (485 - 485 lm)
- e199** - 4000K CRI80 - 8W - Type II - Forward Throw (527 - 527 lm)
- e200** - 2700K CRI90 - 8W - Type II - Forward Throw (426 - 426 lm)
- e201** - 3000K CRI90 - 8W - Type II - Forward Throw (401 - 401 lm)
- e202** - Amber - 7W - Type II - Wide Throw (73 - 73 lm)
- e203** - Amber - 7W - Type II - Forward Throw (97 - 97 lm)

08 OPTIC

- T2-F** - Type II-Forward
- T2-W** - Type II-Wide

09 CONTROL

- ELV** - ELV Dimming (For use with Electronic Low Voltage Dimmer. 120V only.)
- INC** - INC Dimming (For use with Incandescent Dimmer. 120V only.)
- 010** - 0-10V (120V,277V)

11 WIRING LENGTH

WL00 - Standard

12 FINISH

- Standard Finishes
- BLP, BZP, WHP, SAP, BLW, BWZ, WHW, VER**
- Premium Finishes
- CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,**
- WIR, CAP, CRM, AQW, NBP**
- Other - RAL
- RAL**
- Other - Custom Color
- CUS**

13 OPTION

- BF** - Black wrinkle finish on backplate for glare reduction


NOTE: Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

MINI YUKON - Wall Recessed - Line Voltage - LED High-Power - Indirect - Mini

Features



Secured with hidden tamper-resistant stainless steel hardware



Compact housing designed to fit standard stud wall construction



Manufactured in the USA with sustainable processes



Easily replaceable modular components reduce waste and extend fixture life

Technical

Driver: Line Voltage

Light Source (Type): LED High-Power

Material: Aluminum

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 8, 7

Delivered Lumens (lm): 73 - 527

Control: 0-10V (120V, 277V), ELV Dimming (For use with Electronic Low Voltage Dimmer. 120V only.), INC Dimming (For use with Incandescent Dimmer. 120V only.)

Shape: Rectangular Horizontal

Mount: Junction Box

Style: Faceplate: Standard - Backplate: Curved

Version: Indirect - Mini

Input Voltage: 120V, 277V

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

Option: Black wrinkle finish on backplate for glare reduction

Material Detail: Furnished in copper-free aluminum (6061-T6).

Light Source Detail: High power LEDs modular design with electrical disconnects.

Hardware: Tamper-resistant, stainless steel hardware.

Sealing: Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

Finish Detail: StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

MINI YUKON - Wall Recessed - Line Voltage - LED High-Power - Indirect - Mini

Finishes

STANDARD FINISHES




PREMIUM FINISHES



OTHER - RAL



OTHER - CUSTOM COLOR



MINI YUKON - Wall Recessed - Line Voltage - LED High-Power - Indirect - Mini

Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e190	T2-W - Type II-Wide		2700	80	>15	8	322	
e191	T2-W - Type II-Wide		3000	80	>15	8	372	
e192	T2-W - Type II-Wide		3500	80	>15	8	364	
e193	T2-W - Type II-Wide		4000	80	>15	8	396	
e194	T2-W - Type II-Wide		2700	90	>50	8	320	
e195	T2-W - Type II-Wide		3000	90	>50	8	301	
e196	T2-F - Type II-Forward		2700	80	>15	8	429	
e197	T2-F - Type II-Forward		3000	80	>15	8	496	
e198	T2-F - Type II-Forward		3500	80	>15	8	485	
e199	T2-F - Type II-Forward		4000	80	>15	8	527	
e200	T2-F - Type II-Forward		2700	90	>50	8	426	
e201	T2-F - Type II-Forward		3000	90	>50	8	401	
e202	T2-W - Type II-Wide		Amber			7	73	
e203	T2-F - Type II-Forward		Amber			7	97	