


# Universal Power Module PM1 - Camlock Mount - Round - With Mounting Brackets - Remote Transformer - Aluminum

Date  Project  Type






IP66

RoHS

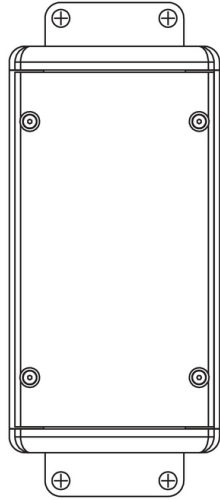

## Downloads

- Product Image
- Technical Drawing
- 2D (.dwg)
- 2D (.dxf)

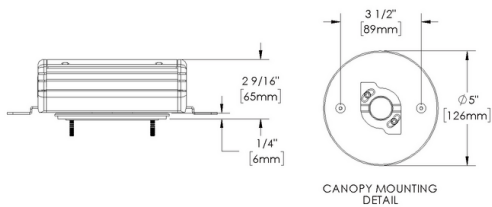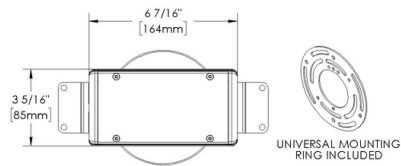

PM1-CR-MB-TR-RM

# Universal Power Module PM1 - Camlock Mount - Round - With Mounting Brackets - Remote Transformer - Aluminum

Date  Project  Type

## Configure

**PM1 -** **CR-MB -** **TR-RM -** **AL -** **\_\_\_ -** **\_\_\_ -**  
 01 02 03 04 05 06

Universal Power Module PM1 - Camlock Mount - Round - With Mounting Brackets - Remote Transformer - Aluminum

### 01 ACCESSORIES

**PM1** - Universal Power Module PM1

### 02 MOUNT

**CR-MB** - Camlock Mount - Round - With Mounting Brackets

### 03 VERSION

**TR-RM** - Remote Transformer

### 04 MATERIAL

**AL** - Aluminum

### 05 POWER SUPPLY

**TRe20-MT-NON** - 20W - 120V to 277V - Non-dimming

**TRSS75-120-ELV** - 60W - 120V - ELV Dimming

**TRSS75-277-NON** - 75W - 277V - Non-dimming

### 06 FINISHES

Standard Finishes

**BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER**

Premium Finishes

**CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP,**

**SDS, WIR, CAP, CRM, AQW, NBP**

Other - RAL

**RAL**

Other - Custom Color

**CUS**

**IMPORTANT: Transformer wattage MUST be calculated based on the total load of the luminaires it will support.**

# Universal Power Module PM1 - Camlock Mount - Round - With Mounting Brackets - Remote Transformer - Aluminum

Date  Project  Type

## Transformers

Power Supply	Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
TRe20-MT-NON	NON	20	-	90		-30°C to 90°C	15VDC +/-5%	-	1
TRSS75-120-ELV	ELV	60	120V	95		-30°C to 90°C	12VAC	-	0
TRSS75-277-NON	NON	60	277V	95	13	40°C	12VDC	-	0

# Universal Power Module PM1 - Camlock Mount - Round - With Mounting Brackets - Remote Transformer - Aluminum

Date

Project

Type

## Technical

**Body:** Furnished in copper-free aluminum (6061-T6).

**Material Detail:** Furnished in copper-free aluminum (6061-T6).

**Installation:** 5" dia., machined canopy. Stainless steel universal mounting ring for use with 4" octagonal junction box. Camlock provides additional 30° adjustment for alignment of UPM regardless of junction box orientation. Mounting brackets to anchor to surface.

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

**Finish Detail:** StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

**Certification:** RoHS compliant components., UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards.

**IMPORTANT: Transformer wattage MUST be calculated based on the total load of the luminaires it will support.**

# Universal Power Module PM1 - Camlock Mount - Round - With Mounting Brackets - Remote Transformer - Aluminum


Date  Project  Type

## Finishes

### STANDARD FINISHES



### PREMIUM FINISHES

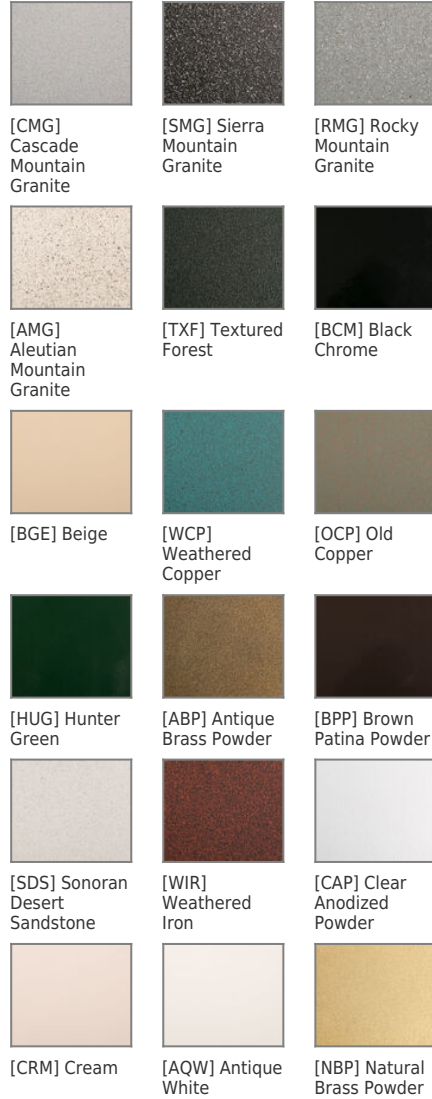

### OTHER - RAL



### OTHER - CUSTOM COLOR



[CUS] Custom Color