Box

Universal Power Module PM1 - Camlock Mount - Round - Single - Offset - Aluminum

Date	Project	Type

Downloads

Product Image

Technical Drawing

2D (.dwg)

2D (.dxf)

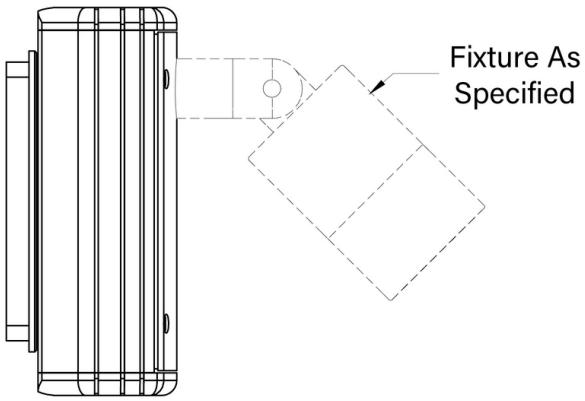

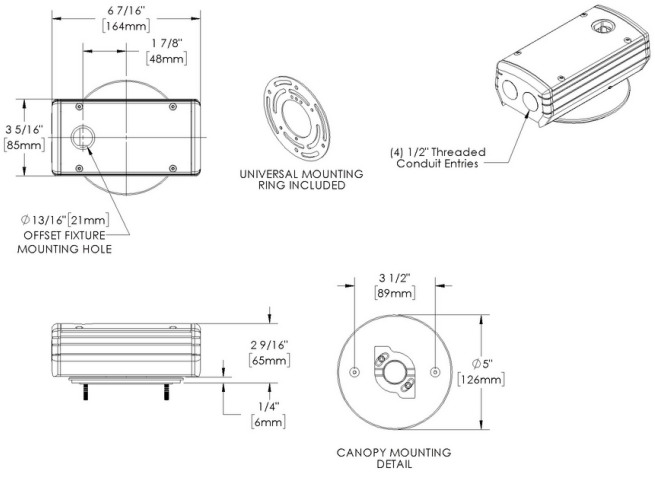

PM1-CR-SO

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Universal Power Module PM1 - Camlock Mount - Round - Single - Offset - Aluminum

Date	Project	Type

Configure

PM1 -	CR -	SO -	AL -	___ -
01	02	03	04	06

Universal Power Module PM1 - Camlock Mount - Round - Single - Offset - Aluminum

01 ACCESSORIES
PM1 - Universal Power Module PM1

02 MOUNT
CR - Camlock Mount - Round

03 VERSION
SO - Single - Offset

04 MATERIAL
AL - Aluminum

06 FINISHES
Standard Finishes

BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER

Premium Finishes

CMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS, WIR, CAP, CRM, AQW, NBP

Other - RAL

RAL

Other - Custom Color

CUS

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Universal Power Module PM1 - Camlock Mount - Round - Single - Offset - Aluminum

Date | Project | Type

Technical

Material Detail: Furnished in copper-free aluminum (6061-T6).

Installation: 5” dia., machined canopy. Stainless steel universal mounting ring for use with 4” octagonal junction box. Camlock provides additional 30° adjustment for precision alignment of UPM regardless of junction box orientation.

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

Body: Extrusion with die cast end caps. Machined cover with countersunk holes for flush hardware installation. Two (2) 1/2” NPT female conduit entries per end cap for through wiring. Patented knockout can be reinserted without compromising seal.

Finish Detail: StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class ‘A’ TGIC polyester powder coating. It is RoHS compliant.

Note: All line and low voltage connections must be made in compliance with the National Electrical Code. Failure to do so will void warranty.

Warranty: 5-year limited warranty.

Certification: RoHS compliant components., UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards.

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Universal Power Module PM1 - Camlock Mount - Round - Single - Offset - Aluminum

Date | Project | Type

Finishes

STANDARD FINISHES

[BLP] Satin Black

[BZP] Satin Bronze

[WHP] Satin White

[SAP] Satin Aluminum

[BLW] Black Wrinkle

[BZW] Bronze Wrinkle

[WHW] White Wrinkle

[VER] Verde

PREMIUM FINISHES

[CMG] Cascade Mountain Granite

[RMG] Rocky Mountain Granite

[AMG] Aleutian Mountain Granite

[TXF] Textured Forest

[BCM] Black Chrome

[BGE] Beige

[WCP] Weathered Copper

[OCP] Old Copper

[HUG] Hunter Green

[ABP] Antique Brass Powder

[BPP] Brown Patina Powder

[SDS] Sonoran Desert Sandstone

[WIR] Weathered Iron

[CAP] Clear Anodized Powder


[CRM] Cream

[AQW] Antique White

[NBP] Natural Brass Powder

OTHER - RAL

[RAL] RAL Color

OTHER - CUSTOM COLOR

[CUS] Custom Color

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com