Power Canopy PC1 - Transformer - Two Fixtures - Aluminum

Date	Project	Type

Downloads

Product Image

Technical Drawing



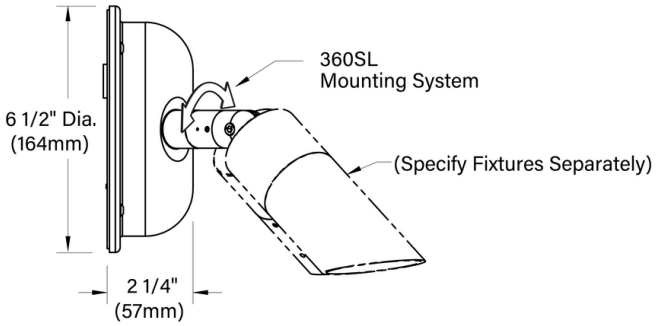

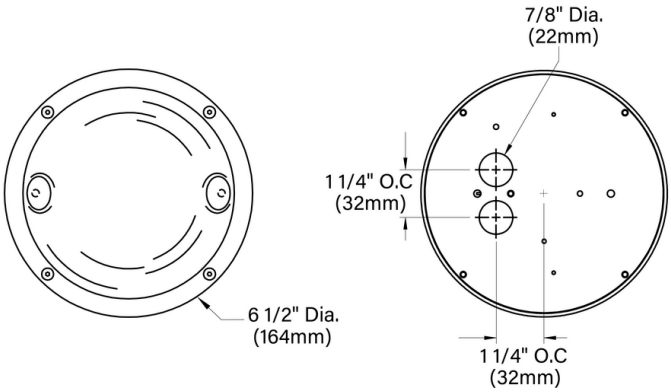

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Power Canopy PC1 - Transformer - Two Fixtures - Aluminum

Date	Project	Type

Configure

PC1 -	TR-TO -	AL -	___ -	___ -
01	03	04	05	06

Power Canopy PC1 - Transformer - Two Fixtures - Aluminum

01 ACCESSORIES
PC1 - Power Canopy PC1

03 VERSION
TR-TO - Transformer - Two Fixtures

04 MATERIAL
AL - Aluminum

05 POWER SUPPLY
QT10-120-MLV - 10W - 120V - MLV Dimming
QT10-277-MLV - 10W - 277V - MLV Dimming
QT20-120-MLV - 20W - 120V - MLV Dimming
QT20-277-MLV - 20W - 277V - MLV Dimming
TRe20-MT-NON - 20W - 120V to 277V - Non-dimming
TRSS75-120-ELV - 60W - 120V - ELV Dimming
TRSS75-277-NON - 75W - 277V - Non-dimming

06 FINISHES
Standard Finishes
BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER
Premium Finishes
CMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS, WIR, CAP, CRM, AQW, NBP
Other - RAL
RAL
Other - Custom Color
CUS

IMPORTANT: Transformer wattage MUST be calculated based on the total load of the luminaires it will support.

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Power Canopy PC1 - Transformer - Two Fixtures - Aluminum

Date | Project | Type

Transformers

Power Supply	Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
QT10-120-MLV	MLV	10	120V				12V	-	
QT10-277-MLV	MLV	10	277V				12V	-	
QT20-120-MLV	MLV	20	120V				12V	-	
QT20-277-MLV	MLV	20	277V				12V	-	
TRe20-MT-NON	NON	20	-	90		-30°C to 90°C	15VDC +/-5%	-	1
TRSS75-120-ELV	ELV	60	120V	95		-30°C to 90°C	12VAC	-	0
TRSS75-277-NON	NON	60	277V	95	13	40°C	12VDC	-	0

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Power Canopy PC1 - Transformer - Two Fixtures - Aluminum

Date	Project	Type

Technical

Material Detail: Furnished in copper-free aluminum (6061-T6).

Installation: Two wire entrance knockouts will accept 1/2” conduit or Romex connectors. Four 3/16” wall plate mounting holes (mounting hardware by others).

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

Body: Machined canopy. Gasket provides watertight seal.

Finish Detail: StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class ‘A’ TGIC polyester powder coating. It is RoHS compliant.

Note: All line and low voltage connections must be made in compliance with the National Electrical Code. Failure to do so will void warranty.

Warranty: 5-year limited warranty.

Certification: RoHS compliant components., UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards.

IMPORTANT: Transformer wattage MUST be calculated based on the total load of the luminaires it will support.

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Power Canopy PC1 - Transformer - Two Fixtures - Aluminum

Date | Project | Type

Finishes

STANDARD FINISHES

[BLP] Satin Black

[BZP] Satin Bronze

[WHP] Satin White

[SAP] Satin Aluminum

[BLW] Black Wrinkle

[BZW] Bronze Wrinkle

[WHW] White Wrinkle

[VER] Verde

PREMIUM FINISHES

[CMG] Cascade Mountain Granite

[RMG] Rocky Mountain Granite

[AMG] Aleutian Mountain Granite

[TXF] Textured Forest

[BCM] Black Chrome

[BGE] Beige

[WCP] Weathered Copper

[OCP] Old Copper

[HUG] Hunter Green

[ABP] Antique Brass Powder

[BPP] Brown Patina Powder

[SDS] Sonoran Desert Sandstone

[WIR] Weathered Iron

[CAP] Clear Anodized Powder


[CRM] Cream

[AQW] Antique White

[NBP] Natural Brass Powder

OTHER - RAL

[RAL] RAL Color

OTHER - CUSTOM COLOR

[CUS] Custom Color

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com