

Magnetic Transformer 600W


Date Project Type

NEMA 3R



[Downloads](#)

[Product Image](#)

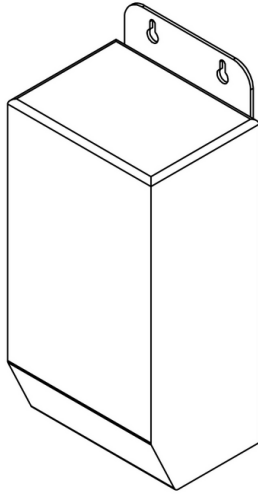

Magnetic Transformer 600W

Date Project Type

--	--	--

Configure

TR600 -

01

___ -
05

Magnetic Transformer 600W

01 ACCESSORIES

TR600 - Magnetic Transformer 600W

05 POWER SUPPLY

120-MLV - 120V - 12VAC Transformer

277-MLV - 277V - 12VAC Transformer

IMPORTANT: Transformer wattage MUST be calculated based on the total load of the luminaires it will support.

Magnetic Transformer 600W

Date Project Type

Transformers

Power Supply	Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
120-MLV	MLV	600	120V			-30°C to 105°C	12Vac	-	
277-MLV	MLV	600	277V			-30°C to 105°C	12Vac	-	

Magnetic Transformer 600W

Date

Project

Type

Technical

Body: NEMA Outdoor 3R rated enclosure. [2] (TR60) or [3] (TR150-600) bottom entry 7/8" knockouts provide access to wiring compartment. Riveted, hinged cover opens vertically from bottom to top for service access.

Material Detail: Furnished in stainless steel (304).

Installation: Surface mount via mounting bracket. Mounting hardware not included.

Warranty: 5-year limited warranty.

Certification: UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards.

IMPORTANT: Transformer wattage MUST be calculated based on the total load of the luminaires it will support.