


# GLOW STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Aluminum - Height: 6" - 24" - Anchor Base



**Downloads**

- Product Images (.zip)
- Technical Drawing (.zip)
- 2D (.dwg)
- 2D (.dxf)
- IES Files (.zip)
- BIM - Revit (.zip)
- Installation Instructions (.pdf)

**Product Variant Examples**

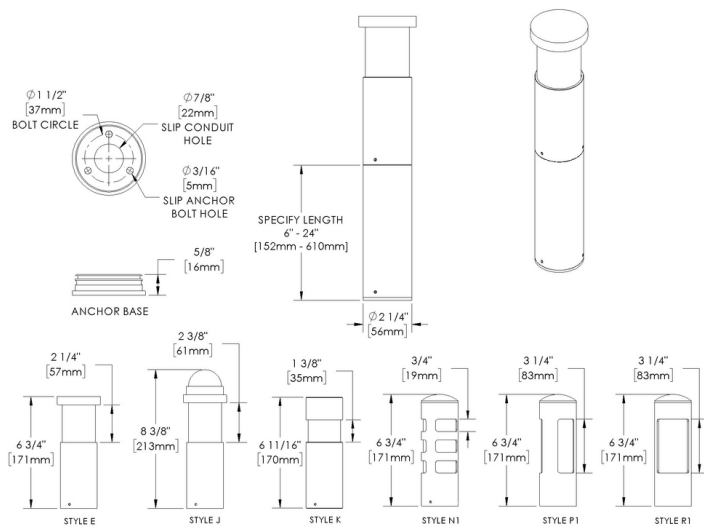

# GLOW STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Aluminum - Height: 6" - 24" - Anchor Base

## Available Logic & Configurations

**GL-** **BO-** **LIT-** **LHP-** **AL-** **AB-** **-** **-**  
 01 02 03 04 05 06B 06C 06F

**01 SERIES**

**GL** - GLOW STAR

**02 CATEGORY**

**BO** - Bollard

**03 DRIVER**

**LIT** - Line Voltage Via Transformer

**04 LIGHT SOURCE (TYPE)**

**LHP** - LED High-Power

**05 MATERIAL**

**AL** - Aluminum

**06B MOUNT**

**AB** - Anchor Base

**06C STYLE**

**SE** - Style E

**SJ** - Style J

**SK** - Style K

**SN1** - Style N1

**SP1** - Style P1

**SR1** - Style R1

**06F SIZE**

**H06** - Height: 06"

**H12** - Height: 12"

**H18** - Height: 18"

**H24** - Height: 24"

**-** **NON-** **WL00-** **-**  
 07 09 11 12

**07 LIGHT SOURCE**

**e64** - 2700K CRI80 - 7W

**e65** - 3000K CRI80 - 7W

**e66** - 4000K CRI80 - 7W (63 - 63 lm)

**e74** - Amber - 7W

**e79** - 2700K CRI90 - 7W

**e80** - 3000K CRI90 - 7W

**e81** - 3500K CRI80 - 7W

**09 CONTROL**

**NON** - Non-dimming

**11 WIRING LENGTH**

**WL00** - Standard

**12 FINISH**

Standard Finishes

**BLP, BZP, WHP, SAP, BLW, BZW, WHW, VER**

Premium Finishes

**CMG, SMG, RMG, AMG, TXF, BCM, BGE, WCP, OCP, HUG, ABP, BPP, SDS,**

**WIR, CAP, CRM, AQW, NBP**

Other - RAL

**RAL**

Other - Custom Color

**CUS**

**NOTE:** Not all configurations may be compatible with one another. Please configure the product for specific 2D, Photometry, Downloads, Spec Sheet and Compatible mountings and power supplies.

# GLOW STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Aluminum - Height: 6" - 24" - Anchor Base

## Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Secured with tamper-resistant, stainless steel hardware



Easily replaceable modular components reduce waste and extend fixture life



Slip fit cap & high temp. silicone 'O' ring provides reliable water-tight seal



Solid billet fixture body provides unmatched durability and heat management

## Technical

**Driver:** Line Voltage Via Transformer

**Light Source (Type):** LED High-Power

**Material:** Aluminum

**CCT (K):** Amber, 2700, 3500, 3000, 4000

**CRI:** 80, 90

**Input Power (W):** 7

**Delivered Lumens (lm):** 63 - 63

**Control:** Non-dimming

**Mount:** Anchor Base

**Style:** Style E, Style J, Style K, Style N1, Style P1, Style R1

**Size:** Height: 06", Height: 12", Height: 18", Height: 24"

**Wiring Length:** Standard

**Finish:** Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color

**Body:** Unibody design with enclosed, water-proof wireway, integral heat sink, fully machined from solid billet, anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

**Material Detail:** Furnished in copper-free aluminum (6061-T6).

**Light Source Detail:** High power LEDs modular design with electrical disconnects.

**Hardware:** Tamper-resistant, stainless steel hardware.

**Sealing:** 'O' Ring provides water-tight seal., Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.

**Note:** Transformer included., Adjust-e-Lume, an LED board feature, allows for dynamic lumen response at the individual fixture. Indexed (100% to 25% nom.) lumen output. Maintains output at desired level or may be changed (A9 to A1). Standard preset from the factory is A9 (100%).

**Finish Detail:** StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating. It is RoHS compliant.

**Warranty:** 5-year limited warranty.

# GLOW STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Aluminum - Height: 6" - 24" - Anchor Base

## Finishes

### STANDARD FINISHES




### PREMIUM FINISHES



### OTHER - RAL



### OTHER - CUSTOM COLOR



# GLOW STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Aluminum - Height: 6" - 24" - Anchor Base

## Light Source

Light Source	Optic	Beam Angle	CCT (K)	CRI	R9	Input Power (W)	Delivered Lumens (Lm)	CBCP
e64	-		2700	80	>15	7		
e65	-		3000	80	>15	7		
e66	-		4000	80	>15	7	63	
e74	-		Amber			7		
e79	-		2700	90	>50	7		
e80	-		3000	90	>50	7		
e81	-		3500	80	>15	7		